SCIENTIFIC AMERICAN

[Entered at the Post Office of New York, N. Y., as Second Class Matter. Copyright, 1909, by Munn & Co.]

Vol. C.—No. 24.
ESTABLISHED 1845.

NEW YORK, JUNE 12, 1909.

[10 CENTS A COPY
$3.00 A YEAR.

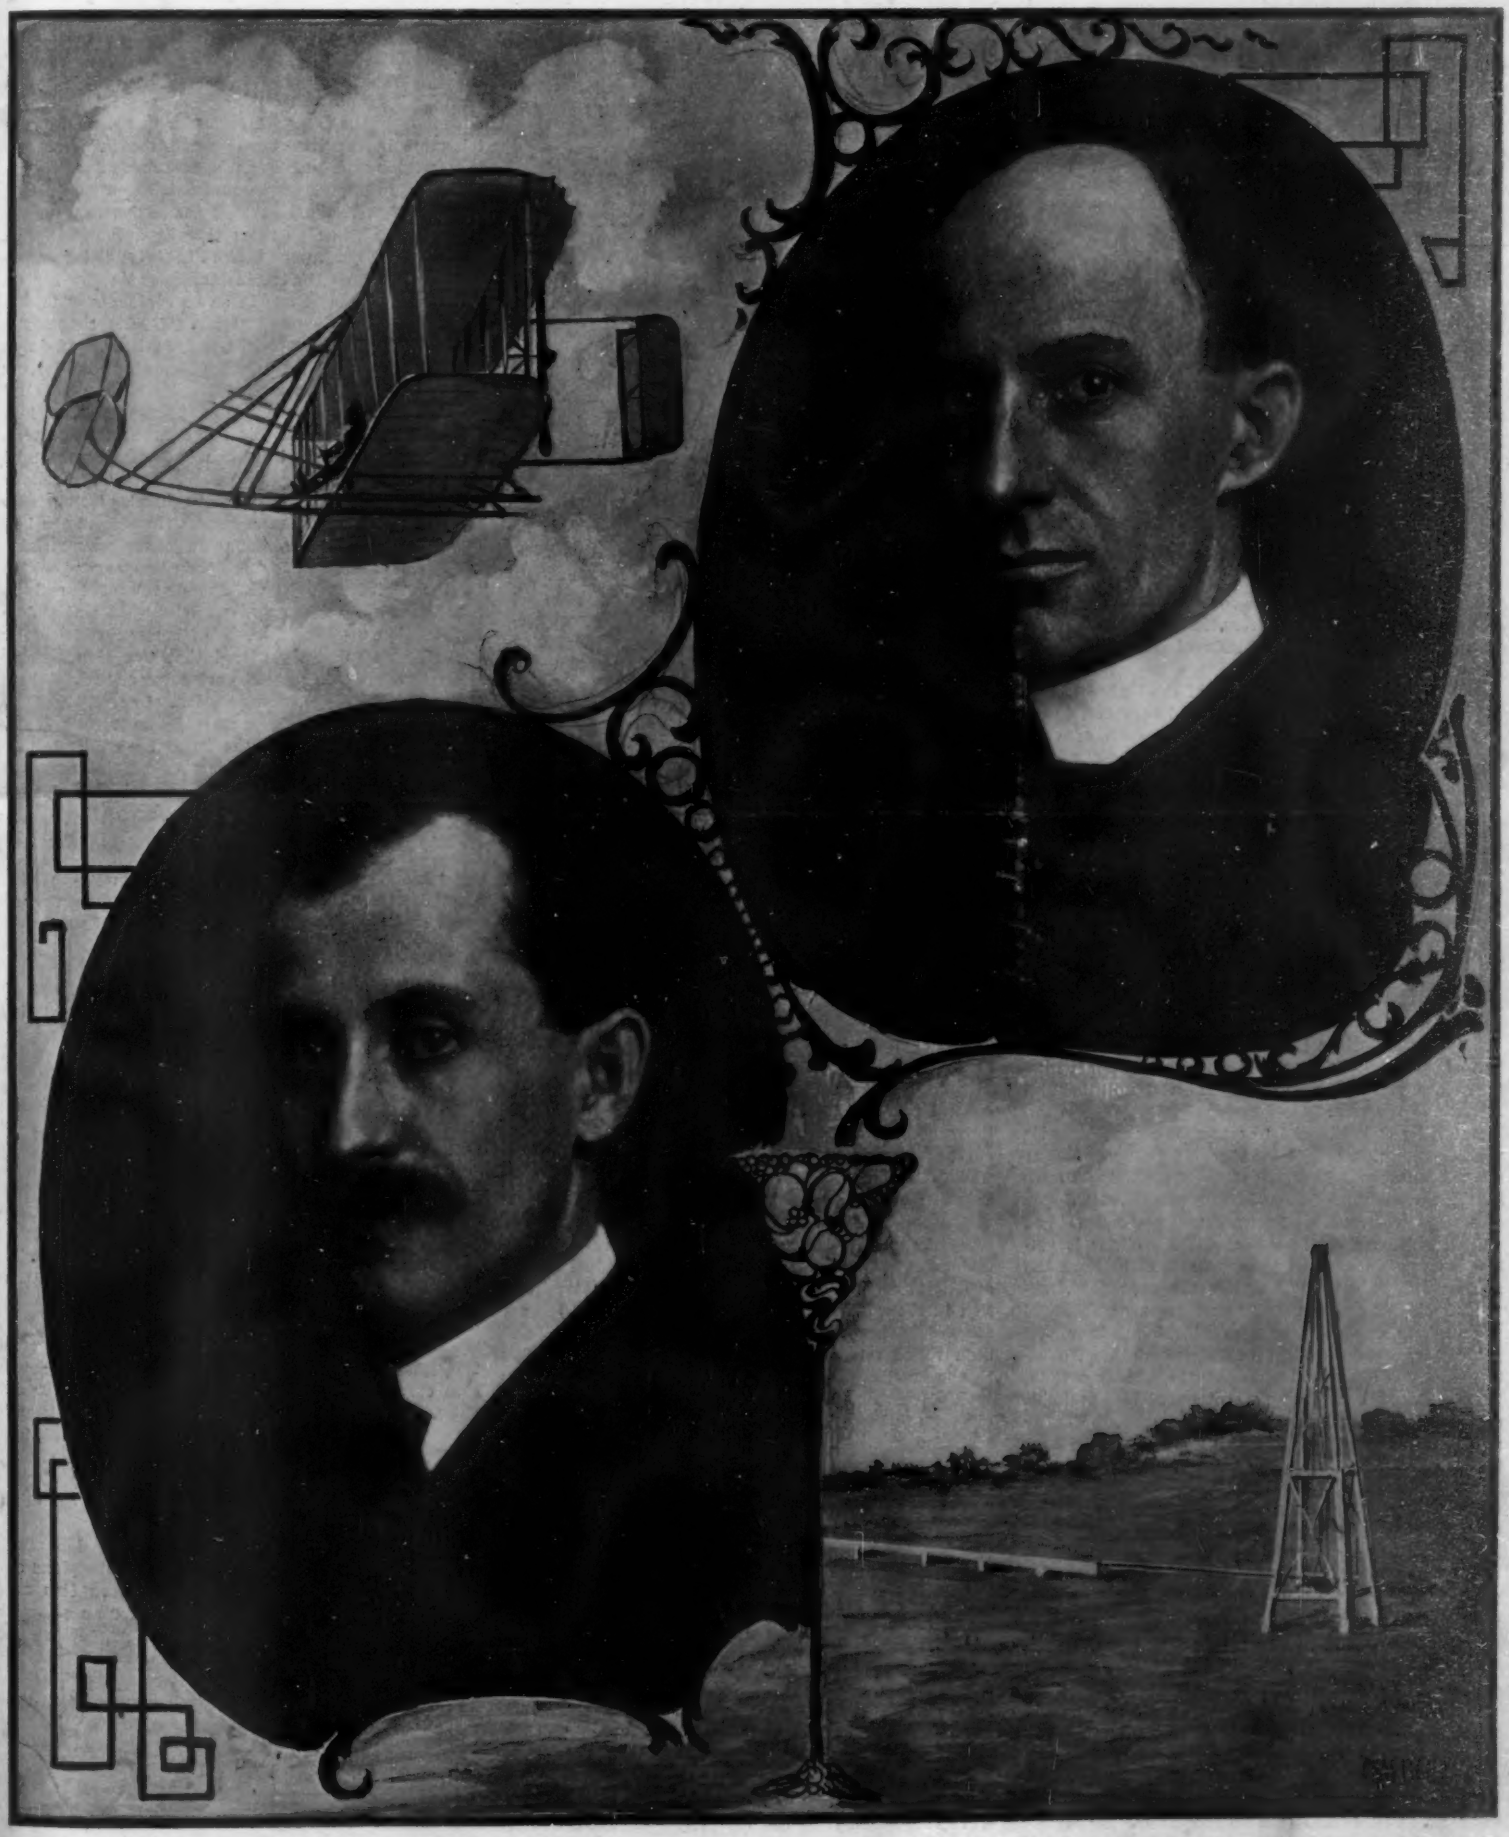

Photographs by Hollinger & Co.

ORVILLE WRIGHT. WILBUR WRIGHT.

THE WRIGHT BROTHERS, INVENTORS OF THE FIRST PRACTICAL FLYING MACHINE, AND THE LEADING AVIATORS OF THE WORLD.—[See page 448.]

SCIENTIFIC AMERICAN

ESTABLISHED 1845

MUNN & CO. - - Editors and Proprietors

Published Weekly at

No. 361 Broadway, New York

CHARLES ALLEN MUNN, *President*
361 Broadway, New York.
FREDERICK CONVERSE BEACH, *Sec'y and Treas.*
361 Broadway, New York.

TERMS TO SUBSCRIBERS.

One copy, one year, for the United States or Mexico $3.00
One copy, one year, for Canada 3.75
One copy, one year, to any foreign country, postage prepaid, 18s. 6d. 4.50

THE SCIENTIFIC AMERICAN PUBLICATIONS.

Scientific American (established 1845) .....$3.00 a year
Scientific American Supplement (established 1876)..... 5.00 "
American Homes and Gardens ..... 3.00 "
Scientific American Export Edition (established 1878). ..... 3.00 "

The combined subscription rates and rates to foreign countries, including Canada, will be furnished upon application.
Remit by postal or express money order, or by bank draft or check.
MUNN & CO., 361 Broadway, New York.

NEW YORK, SATURDAY, JUNE 12th, 1909.

The Editor is always glad to receive for examination illustrated articles on subjects of timely interest. If the photographs are *sharp*, the articles *short*, and the facts *authentic*, the contributions will receive special attention. Accepted articles will be paid for at regular space rates.

THE WASTE OF OUR NATURAL RESOURCES.

The present awakening of the national conscience on the subject of the waste of our natural resources is one of the most encouraging signs of the times; but in this, as in all other great national awakenings, there is the danger that the movement may never progress beyond the stage of discussion to that of practical effort. Until the necessary legislation is secured, it is well for us to take an occasional review of the present conditions of waste, and point to the ultimate absolute depletion of our resources which must inevitably ensue unless the strong arm of the law be called in to enforce remedial and preventive measures. We have before us a succinct review of the question by Dr. George F. Swain in a paper presented at the recent annual meeting of the National Association of Cotton Manufacturers, in which the subject is treated under the four heads of Forests, Water, Lands, and Minerals.

At the present time the people of the United States use annually forty cubic feet of wood per acre, as an offset to which there is a natural growth of only twelve cubic feet per acre. In answer to the question, whether it is necessary for us to use three times what we produce, attention is invited to the fact that, while in the United States we use 262 cubic feet per capita, Germany uses only 37, France 25, and Great Britain 14 cubic feet per capita. Forest fires, most of which are entirely preventable, have consumed since 1870 an average of 50,000,000 acres of standing timber per year. There is much unnecessary waste due to careless methods of logging and sawing. For each 1,000 feet of standing timber that are cut down, only 320 feet are put to use. Tanning establishments bark the trees and leave them to die. The turpentine industry, also, results in a large annual destruction of timber. It is not to be wondered at that in the last nine years the price of yellow pine at the mill has increased 65 per cent.

Natural gas is allowed to waste in many localities without restraint, and it is estimated that a sufficient amount is lost to light all the cities of the United States having a population of over 100,000. At the present rate of use and waste all the known supplies of natural gas will be exhausted in 25 years. As for oil, it is sufficient to state that at the present rate of increase the supply will be exhausted before the year 1950. Although there has been an improvement of about 50 per cent in our methods of coal mining in recent years, the present system is uneconomical. We extract the high grade coal and allow the mine to cave in, thereby wasting a large percentage of the available supply. By the middle of the next century, the easily accessible and available coal in this country will have been exhausted.

The situation with respect to our supplies of iron ore is even more serious; for it is estimated that, if the present rate of increase of consumption continues, the known supply of high grade ore will be gone by the middle of the present century. Twenty-five years is also the limit set for the exhaustion of another important mineral—phosphate rock. Taking all our mineral products together, it is estimated that the total waste approximates $1,000,000 per day or over one-sixth of the value of the total production.

As to public lands, or lands in general, it is undeniable that we are failing to secure as large crops as we should, chiefly because we neglect some fundamental principles, such as the development of rotating crops, and so plowing on sloping grounds as to prevent washing away of the soil. Although we have some of the richest soil in the world, the average yield per acre from 1897 to 1906 was 13.8 bushels of wheat in the United States as against 28 in Germany and 32.2 in the United Kingdom.

The facts as above set forth relating to the exhaustion of our fuel supplies indicate that in the future years the value of water power as a national asset will become increasingly evident. To utilize the full hydraulic power of the rivers it will be of the greatest importance to reduce the extremes of flow so that the waste of water through floods may be made a minimum. Statistics show, moreover, that the annual damage done by floods is increasing and has risen from $45,000,000 in 1900 to $118,000,000 in 1907. The Merrimac River discharges at its period of highest flood seventy times as much water per second as it does at its lowest stage, and ten times as much as its average flow throughout the year. The regularity of the flow may be increased by the preservation of the forest, whose presence tends to retard the run-off of the rainfall, and by the construction of reservoirs, which will hold back the floods and allow the surplus waters to be drawn off as needed, thereby increasing the average flow throughout the year. Particularly necessary is it to protect the forests on steep mountain slopes, with a view to the prevention of floods and the resulting destruction of the arable lands in the lower valleys. In the Tenth Congress on International Navigation held in Milan in 1905, the engineers were unanimous upon this point. M. Lafosse, the French delegate, describes the evil effect of stripping the mountain sides as follows:

"The soil, swept bare of its forests, exhausted by the abuses of grazing, loses quickly its vegetable stratum. Washed periodically, and carried away by melting snow and summer storms, it is soon disaggregated. The waters run toward the low points, rolling before them gravel and boulders, and even tearing out loose sections of rock. A thousand rivulets cut out beds, the torrent is formed. Scours begin, the banks are broken down, and a mass of mud, stones and rocks invades the valley, destroying everything as it passes."

Most of the countries of Europe have learned the lesson and taken steps for the careful preservation of their forests; and this has been done not merely with a view to increasing the timber supply, but in the interests of navigation. Over half a century ago, the French government entered upon a policy of forest protection and reforestation, and up to the 1st of January, 1900, they had acquired no less than 620 square miles for these purposes. The efforts of our own government to solve this question on a scale commensurate with its importance should receive the hearty co-operation of every State of the Union.

FEWER BROKEN RAILS.

The alarming increase in the number of broken rails in the State of New York induced the Legislature, some three years ago, to make an investigation of the subject. The conditions were found to be so serious as fully to justify the complaints of the engineers of the railroads, that they were receiving from the manufacturers rails which were faulty both in composition and manufacture. The official investigation showed that the number of rails broken during the winter months in New York State alone ran up into the thousands. The subject was given that healthy publicity, which of late years has resulted in so many improvements affecting the welfare of the general public, and ultimately the manufacturers and the representatives of the railroads met for a thorough discussion of the subject, the outcome of which was a revision of the methods of manufacture and the adoption of specifications which were acceptable both to the rail makers and the engineers. Although it is too early as yet to judge how nearly the rails rolled under the new specifications approach the ideal standard, it is certain that there has been a great reduction in the number of breakages. Many of the recent failures have occurred, of course, in rails which had been rolled under the old system and were already in the tracks when the agitation for better material took place. As time progresses, and the place of the old rails is taken by those of a better quality, we may look for a still further decrease in the number of breakages.

With a view to determining what progress is being made, the Public Service Commission of this State has made a comparison of the returns furnished by the railroads for the four months of December, 1907, and January, February, and March, 1908, with those of the corresponding four months of the past winter. The information required for the earlier period included the rail specifications adopted since June 1st, 1907. The reports, which are practically complete, show that whereas during the winter of 1907 to 1908 there was a total number of rail failures of 3,917, the number for the winter of 1908 to 1909 was only 1,829, relatively a most satisfactory condition. Taking some of the larger roads, we find that there is a reduction on the Erie from 473 failures to 202; on the Delaware & Hudson, from 500 to 162; on the Lake Shore, from 354 to 93; on the New York Central, from 1,601 to 537; and on the Pennsylvania Railroad, from 228 to 139. Of the 54 steam roads included in the report, there is an average reduction of 50 per cent in the failures, and 22 roads report that they had no cases of broken rails. It is encouraging to learn that only four of the failures resulted in accidents, and that all of these occurred to freight trains.

A NEW FIRE-ALARM SYSTEM FOR NEW YORK.

The recent decision of the Board of Estimate and Apportionment of New York city to appropriate the sum of $100,000 for the preparation of plans for a new fire-alarm service, and the expressed willingness of these custodians of the city's funds to vote in the near future an outlay of about two millions of dollars for this purpose, will mark, it is hoped, the passing of one of the most serious dangers that menaces New York. At the very root of all fire protection lies the prompt and correct announcement of a fire by suitable mechanical and electrical devices. New York's fire department has been hampered by an obsolete and inefficient system, largely of a makeshift character and with little or no protection against damage or breakdown. Only the skill and ingenuity of the men of the telegraph bureau have made possible even a satisfactory working under normal conditions. Despite the pleas of fire commissioners and chiefs, not to mention the warnings of the insurance companies most pointedly expressed in high rates, the city authorities have for years refused to take notice of this condition and to appropriate funds for the installation of a new system to take the place of one in so scandalous a condition that it is beyond hope of repair. The Merchants' Association, the fire insurance underwriters, and large business interests have at last succeeded in driving home the needs of the fire department. The central office of the fire alarm system is at present housed in a building which in itself is not a first-class fire risk, surrounded as it is by much inflammable material used as kindling for the engines and forage for the horses of the engine company that it also shelters. Signals are sent to the fire houses throughout the borough of Manhattan along main circuits comprising cables attached in little more than temporary position to the Third and Ninth Avenue elevated railway structures in close proximity to the third rail and to high-tension feeders. Fire-alarm boxes are frequently to be found so poorly placed that two simultaneous alarms would interfere with each other and render both signals impossible of interpretation. In fact, the situation is even now considered so critical, that this winter a makeshift protection in the form of a duplicate telephone switchboard for fire department purposes was installed in a nearby telephone central exchange, so that in the event of the destruction of fire headquarters, telephone communication with the various engine and other fire houses could be maintained.

To ascertain the reasons for this sorry condition of affairs in the largest American city means a study of New York's municipal growth, for the original fire-alarm telegraph plant was installed about 1865, when the "paid system" supplanted the volunteer fire department. The plant was located in the old central station in Mercer Street until removed uptown in 1887 to fire headquarters in Sixty-seventh Street. To accommodate the growth of the city, various extensions have been made both of circuits and apparatus, but without removing it from the sixth floor of fire headquarters. Particularly objectionable is the method of leading the cables into the building. Cables, boxes, and connections are all in a hopeless state of more or less inefficiency. Instead of a non-fireproof fire headquarters containing inflammable materials, it is proposed to erect either in Central Park or some equally isolated place, a central fire-alarm telegraph station in a building absolutely fireproof and devoted to no other purpose, a building which neither fire nor flood can damage. The telegraph and telephone wires of the system are to be laid in underground ducts or subways, carefully protected throughout their course from high-tension current or from possible contact with power circuits. The distribution of circuits is to be systematically planned as regards the territory served, while the boxes themselves are to be of the non-interfering type, so that every signal will be recorded clearly, whether sent in alone or simultaneously with other alarms.

The estimated cost of this system is placed at about two millions of dollars, for which, when the plans are prepared, bonds will be issued. Large as this sum may seem, it is a small price to pay for an essential improvement so long postponed. In fact, just as the high-pressure service has proved an excellent investment for the city, and has been the means of giving vastly increased protection at reduced expense, so a modern and adequate fire-alarm telegraph system will doubtless be the means of effecting a further reduction in insurance rates.

According to the report of the Interstate Commerce Commission, many railroads are beginning to use telephony instead of telegraphy for train dispatching. During the year 1908 the telephone was adopted on 2,357 miles of railroad.

AUTOMOBILE.

As the result of ten years' study and experiment, the White Company has at last perfected a kerosene burner for its steam cars, the results obtained with which are claimed to be equal in every respect to those of the gasoline burner. The new burner has the additional advantage of being adjustable for gasoline also, so that whichever fuel is most readily accessible may be used.

A demand is arising in France for road races for stock cars only. The specially constructed road-racing machines of France having been defeated, their celebrated makers came to the conclusion that they were an expensive luxury, and road racing waned in popularity. The Grand Prix of this year has only about six entries, including a "freak" single-cylinder car with a 4-inch bore, 10-inch stroke, and three each of intake and exhaust valves. This state of things is causing a demand among the smaller makers for races limited to strictly stock cars.

In England, where the road problem is somewhat different from ours, consisting of the damage to previously good roads by automobile traffic, instead of the absence of good roads suitable for the latter, it has come to be realized that the difficulty is largely one of maintaining a surface suitable for *mixed* traffic. It is pointed out that in the old coaching days those vehicles were often more numerous on the highways than motors are now, and that it is only since the railways so greatly reduced road traffic that highways came to be considered a legitimate playground for children, dogs, and chickens, so embarrassing to the automobilist. The further elimination of horses, due to the increasing use of automobiles for all purposes, will soon bring about a state of things in which highways will not be subjected to two opposed methods of wear and tear which cannot be resisted by the same means, and the problem of maintaining a durable and dustless surface will be greatly simplified.

The brake and dust trials conducted by officials of the Department of Agriculture at Newark, N. J., produced some interesting results, which should be consoling to the nervous pedestrian who considers the dangers of the street to be increased by the multiplication of automobiles. The fact, already obvious to the well-informed, that a competently driven automobile is much more controllable than the best-driven horse-drawn vehicle, was conclusively proved; and as the majority of automobile drivers are more skilled, or at least more trained, than the majority of horse drivers, the increase of automobilism should make for public safety. All kinds of motor cars, motor cycles, and pair and single horse-drawn vehicles were included in the trials, and the best stops made by the latter were in 27 and 55 feet at 10 and 18 miles per hour respectively, while automobiles stopped in 10 feet and 31 feet at 10 and 20 miles per hour, and in 53 and 74 feet at 21 and 30 miles per hour. It is thus shown that automobiles may safely proceed at twice the pace of which a horse-drawn vehicle is capable and still be pulled up in the same or less distance.

In the recent efficiency test conducted under the auspices of the New York Automobile Trade Association, known as the "one-gallon" test, the points were awarded in such a manner as to really indicate the comparative merit of design of the different cars, which can hardly be said of any previous contest on similar lines. In previous tests of distance traveled for a given quantity of fuel, distance was the only criterion of success, and, given equal ability on the part of the drivers in economic manipulation of fuel, the chances were all in favor of the lighter cars, which obviously ought to travel a greater distance per pound of fuel consumed than heavier ones. In the recent contest, however, the basis of comparison was the ton-mile transported, so that a heavy car traveling a shorter distance had a chance of beating a light car traveling a greater number of miles. The obvious advantages of this diagnostic, at least to the inexpert amateur looking for an economical car, were sufficiently borne out by the results: although the contest was won by the fifth lightest car out of twenty entered, the heaviest car on the list was first in its class and third in the entire list, and this in spite of its being of the six-cylinder type generally considered to be large consumers of fuel. The winner was an 18-H.P. 4-cylinder Franklin weighing 1,900 pounds light and 2,880 pounds with its full complement of five passengers, which it carried for 35.8 miles, making a score of 103,104 pound-miles or 51.55 ton-miles. The second was a single-cylinder 10-horse-power Cadillac, one of the cheapest cars entered, which ran the longest distance of all, 42.6 miles, making a score of 99,045 pound-miles; while the big Lozier, which was third, carried its 5,230 pounds of car and passengers 17.2 miles, making a score of 98,443. These figures are certainly rather a revelation of the possibilities of economical travel by means of automobiles, 51½ ton-miles for a gallon of gasoline, i. e., at a cost of 16 cents, representing remarkably cheap road haulage of either passengers or freight.

ELECTRICITY.

In order to permit of using tungsten lamps of low voltage in illuminated signs, a special type of transformer has been designed, which reduces the voltage in the ratio of 10 to 1. With a view to preventing loss of current in a flashing sign, these transformers are controlled through the primary circuit.

A novel galvanic cell has recently been invented, which generates an alternating current. The electrodes of this cell are thin sheets of iron, and the electrolyte is a mixture of equal volumes of a two per cent sulphuric acid solution and a saturated bichromate solution. This cell deflects the needle of the voltmeter to each side of the zero position every five or ten seconds, the voltage indicated being plus 0.4 volt and minus 0.4 volt. This action is kept up for hours.

The city of Boston is having 3,000 magnetite arc lamps installed for street illumination. The magnetite arc burns in open air like the original carbon arc, and on a direct current only. One of the electrodes is of copper, while the other, or negative electrode, is made of iron oxide and titanium. Only the latter electrode need be replaced when trimming the lamp, while the positive electrode lasts for over two years. One of the advantages of this type of arc lamp is that it can be operated on the same circuits with tungsten incandescent lamps, making a very convenient and attractive combination for street lighting.

To protect wooden electric light and telephone poles from being gnawed by horses, it is customary to wrap the wood with wire. With a view to facilitating this work, which is quite slow and consequently expensive when done by hand, a pole-wrapping machine has been devised. The machine carries a reel of wire, and is mounted on four grooved rollers which bear against the pole, being held in contact by the tension of a spiral spring. A cutter wheel is mounted on the machine, which serves to cut a spiral groove for the wire. The pitch of the groove may be varied by adjusting the cutter. With this machine it requires but fifteen or twenty minutes to wrap a pole, and the wire is laid on so tightly that it may be held with a single row of staples. The machine also serves for splicing poles.

An ingenious method of measuring the moisture in corn is to convert the kernel of the corn into a battery cell. The instrument is supplied with two pins, one of copper and the other of zinc, which are forced into the kernel of corn and serve as the electrodes of the battery, while the moist germ of the kernel is the electrolyte. A tiny current is thus generated, and its value is read by means of a galvanometer. In this manner it is possible to determine the amount of moisture in the corn. In a similar way, wheat and other grains are tested; but as it is impossible to penetrate the kernels, the grain is packed tightly in a vessel and two large plates are used for the electrodes. In some cases, a current is passed through the grain, and the moisture is determined by noting the electrical resistance with a Wheatstone bridge.

When a Wehnelt interrupter is used with an alternating current, the anode, which is ordinarily made of platinum, is very rapidly disintegrated. To overcome this defect, a German inventor has devised a type in which a carbon rod is used in place of platinum. A porcelain tube with a 3-millimeter bore is supported in the vessel, which is filled with sulphuric acid. A carbon rod covered with a thin coating of copper is arranged to fit into the bore of the porcelain tube. The porcelain arm, which bears against the bottom of the rod, may be adjusted to raise or lower the rod, thus determining the amount that projects below the end of the tube. A weight on the carbon rod presses the anode against the porcelain arm. The intensity of the current is determined by the thickness of the coating on the carbon. This construction was found to be very satisfactory on alternating-current circuits. A voltage of from 60 to 150 was required to operate the interrupter.

Investigations of the electrical state of the upper atmosphere during July and August last were made at the Glossop Observatory in England. A wire was elevated by a kite and a dead-beat galvanometer was used to measure the currents. It was found that the current was too large, at times, for the capacity of the instrument, and it was necessary to connect it in shunt. The results of the experiments were as follows, the mean current values being given:

Height above ground.	Current in amperes.
2,000 feet	5×10^{-5}
4,000 feet	13×10^{-5}
6,000 feet	23×10^{-5}

The current values varied considerably during the period of the investigations, and seemed to depend to a large extent upon the velocity of the wind. The greater the velocity, the greater was the current. Although the investigators attempted to measure the potential of the air, they were unable to obtain very satisfactory results, owing to the impossibility of insulating the apparatus perfectly against the high potentials.

SCIENCE.

A large villa was recently unearthed at Pompeii by a restaurant keeper, who obtained permission recently to excavate on a plot of land adjacent to some recently discovered tombs. It is stated that some excellently preserved frescoes were revealed.

By a process recently patented in Austria, caoutchouc is recovered from materials of every kind which contain it, by heating the finely divided material to 212 deg. F. or higher with ethers of the cyclic or acyclic series which boil at temperatures higher than 212 deg. F., and by precipitation the caoutchouc from the solution is thus obtained.

Typhoid fever vaccination has met with the approval of the army. Of the 150 men of the hospital corps on duty at the Walter Reed Hospital in the District of Columbia, 98 per cent have volunteered for anti-typhoid vaccination, and already over two-thirds have voluntarily returned for the second application. By this writing, probably all have returned. No opposition has been encountered, and the entire experiment has proved a success.

Auer von Welsbach, the well-known inventor of the incandescent gas mantle, has produced an alloy of iron and thorium which possesses remarkable properties. When struck lightly against a piece of iron this alloy emits exceedingly bright sparks, produced by the almost instantaneous oxidation of particles detached by the blow. Sufficient heat is developed to ignite tinder instantaneously, without the repeated efforts required by the old-fashioned flint and steel. The new thorium "flint," indeed, may be called an everlasting match. It will be very useful to explorers and tourists and should be of great value for the ignition of explosives, for military and other purposes.

Near the little Italian city of Adria excavations are being made on the site of the ancient Adria, a prosperous Etruscan seaport which gave its name to the Adriatic Sea. In the course of ages the city was buried beneath the alluvium of the Po and the Adige, and the sea receded from its site, which is now 18 miles from the coast. The project of exhuming the buried city has been discussed for many years, but until recently its accomplishment was prevented by financial difficulties. The work is in charge of a commission which includes the most celebrated archæologists of Italy, and it is expected to result in the discovery of archæological treasures of the greatest importance.

Of all the preservatives for milk, hydrogen dioxide has been regarded as the simplest and safest because of its ultimate decomposition into innocuous products. In the Moniteur Scientifique E. Feder condemns the use of this substance as dangerous and gives a method by which its presence in milk can be detected. This method, devised by Fritzmann, consists in adding to the suspected milk a small quantity of a mixture of formaldehyde and strong sulphuric acid. The presence of hydrogen dioxide is revealed by a bluish violet coloration. The same coloration is produced when formaldehyde and hydrochloric acid are added to the milk at the temperature of ebullition.

Mr. Marconi denies the statement which has recently been made that wireless telegraph waves are injurious to operators, and that they produce various diseases such as conjunctivitis, corneal ulcers, leukoma. To use his own words: "During the twelve years or so of our operations we have had to deal with no single case of compensation for any injury of this origin, nor, so far as I can ascertain, has any such injury been suffered. Speaking for myself," I may remark that my own health has never been better than during the often extended periods when I have been exposed for many hours daily to the conditions now challenged, and in the constant neighborhood of electrical discharges at our transatlantic stations, which I believe are the most powerful in the world."

The use of compressed acetylene has hitherto been prevented by the great risk of explosion incurred when this gas is confined under a pressure exceeding two atmospheres. According to Claude and Hess, this danger does not exist when the compressed acetylene is dissolved in 90 per cent acetone. In the practical application of this principle the acetone is forced into steel cylinders, filled with a porous mass composed of infusorial earth, a special wood charcoal and a suitable binder. Acetylene, also under high pressure, is then forced in and dissolves in the acetone. At ordinary temperature and atmospheric pressure acetone dissolves 24 times its volume of acetylene, but at 12 atmospheres it dissolves nearly 300 volumes of acetylene (measured before compression). In practice cylinders of about ⅛, ½, and 1 cubic foot capacity are employed, which contain respectively 12, 50 and 100 cubic feet of acetylene. They are useful for lighting railway cars, automobiles, buoys, etc., and for autogenous welding of metals.

BELIN'S IMPROVED APPARATUS FOR THE ELECTRICAL TRANSMISSION OF PICTURES.

BY JACQUES BOYER.

The Scientific American of December 21st, 1907, contained a description of the tele-photographic process invented by Edouard Belin. The object of this first tele-stereograph, as the inventor calls the apparatus, like that of the improved form now to be described, was to transmit and reproduce photographically all drawings and pictures in relief. In this first experimental apparatus, which gave some very encouraging results, the transmitting and receiving stations were mounted on one table and driven by the same motor. The fictitious distance between them was represented by a resistance equal to that of 750 miles of telephone wire. Furthermore the two stations did not possess the apparatus which is required for photographic transmission to great distances over actual telephone circuits.

The new apparatus, here illustrated, was experimentally used with success between Paris and Lyons in January of this year. The two stations, now separated, are operated simultaneously by an electrical device which insures synchronism. These stations are absolutely identical, and either may be adapted for receiving or transmitting by moving a switch.

The process of transmission is based upon the fact that a photographic print in bichromated gelatin presents, even when dry, a series of elevations and depressions, and that some other prints have the same peculiarity. The white parts of the picture are represented by the deepest depressions; and the blacks by the highest elevations, while the half tints are represented by intermediate thicknesses of gelatin, in exact accordance with their depth of tint. The photographic print is affixed to a cylinder which rotates before a tracing point carried by the short arm of lever. The long arm of this lever carries a little wheel which rolls upon a diminutive rheostat formed of plates of silver alternating with sheets of mica, the thickness of the whole being only 1/10 inch. Each silver plate is connected with the junction between two consecutive coils of a resistance box, such as is used in physical laboratories. The first coil represents the resistance of the line, and the other coils are so calculated that their successive intercalation produces a uniform decrease in current strength.

The tracing point travels over the surface of the cylinder in a spiral line, and the lines thus formed are 1/6, 1/5, or ¼ of a millimeter (1/150, 1/125, or 1/100 inch) apart, the change from one system to another being made by a simple mechanical adjustment.

The diameter and length of the cylinder are such that it is covered by a print measuring about 4 by 5½ inches.

The receiving station is composed essentially of:

1. A Blondel oscillograph which is connected with the line wire and translates the fluctuations of the current into oscillations of a beam of light, reflected by a small mirror.

2. A rectangular box, shown in profile in one of the photographs, in which the receiving cylinder rotates. This cylinder, corresponding in dimension with the transmitting cylinder, carries the photographic film or paper upon which the transmitted picture is impressed.

Fig. 1.—A portrait transmitted from Lyons to Paris in 5⅕ minutes by the new Belin telestereograph.

In the wall of the box opposite this film is a circular opening of a diameter of 1/6, 1/5, or 1/4 millimeter, according to the scheme employed.

3. A Nernst lamp provided with a lens, which condenses its rays upon the mirror of the oscillograph.

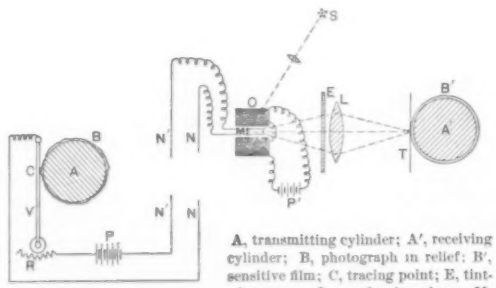

A, transmitting cylinder; A', receiving cylinder; B, photograph in relief; B', sensitive film; C, tracing point; E, tinted screen; L, condensing lens; M, mirror; N N', line wires; O, Blondel oscillograph; P P', electric batteries; R, rheostat; S, Nernst lamp; T, aperture 1/10 inch diameter; V, lever.

Fig. 4. Diagram illustrating the operation of the Belin telestereograph.

4. An aplanatic lens which converges upon the sensitive film the rays reflected by the mirror. The mirror and the point of incidence on the film are conjugate foci of this lens.

5. A screen of graduated tints placed in front of the lens.

With the aid of this description and the accompanying diagram the operation of the system will be easily understood.

When the apparatus is started the elevations and depressions of the picture at the transmitting station impress continuous oscillatory movements upon the tracing point, and consequently upon the little wheel at the other end of the lever. When the wheel, as a result of these movements, is at one side of the rheostat, no resistance is added to that of the line and the current is a maximum. When the wheel is at the other side of the rheostat all the additional resistances are inserted and the current is a minimum. In intermediate positions the strength of the current is a function of the position and the variations thus produced are rigorously proportional to the elevations and depressions and consequently to the variations of tint of the original picture; hence, on reaching the receiving station the fluctuations of this current impress upon the mirror of the oscillograph rapid successive deviations proportional to the varying strength of the current. In consequence of these deviations the reflected pencil of light oscillates from right to left and from the center to the edge of the lens after traversing the graded screen, the function of which is to reduce the luminous intensity more or less, according to the position of the pencil. As the film and the mirror are at conjugate foci, the aperture in the box is continuously illuminated. Hence when the luminous pencil falls upon the center of the lens the absolute transparency of the screen at this point produces no diminution, and the impression is a maximum, producing a black spot in the photograph. When the luminous pencil falls on the edge of the lens the absolute opacity of the screen at this point entirely extinguishes the light and a white spot in the photograph results. In every other position of the reflected beam a partial extinction by the tinted screen produces the photographic effect desired; and the combination of all these effects produces a picture entirely similar to the original, and having all its detail, down to a fineness of 1/6, 1/5, or 1/4 of a millimeter (1/150, 1/125, or 1/100 inch) according to the system used.

It is very evident that if the tints are correctly graded and the sensitiveness of the oscillograph is properly adjusted the copy must be entirely similar to the original; but the degree of contrast of the copy can be diminished or increased by enlarging or contracting the cross section of the luminous pencil, and consequently of the spot of light and the elements of which the resulting photograph is composed.

In most cases the receiver is of the same dimensions as the transmitter; but if the essential organs, namely, the screw, the cylinder, and the aperture of the receiver,

(Concluded on page 442.)

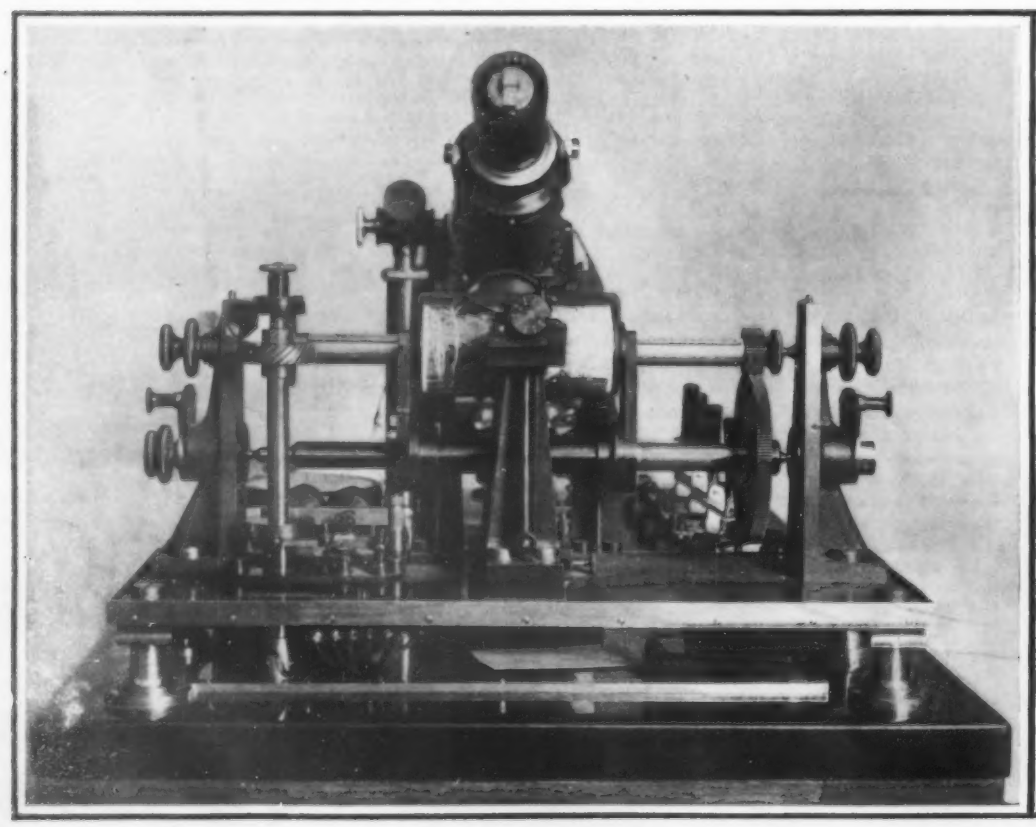

Fig. 3.—Front view of the apparatus with the cover of the cylinder removed.

Fig. 2.—The new Belin telestereograph.

BELIN'S IMPROVED APPARATUS FOR THE ELECTRICAL TRANSMISSION OF PICTURES.

IS THE EARTH'S SHAPE CHANGING?

BY J. P. SPRINGER.

We have been so accustomed to regard the earth as globular, or at most as a sphere symmetrically flattened, that it is somewhat startling to be told that there is perhaps something of a polyhedral form to it. Back in the seventies, Mr. Lowthian Green discussed at length the proposition that the contraction of the earth subsequent to its condensation into a spheroidal



Fig. 1.—Top view of a regular tetrahedron.

form has been in the direction of a regular tetrahedron. We must not understand from this, however, that if we could station ourselves off somewhere in space, and view the earth as a whole, we should see, in accordance with this hypothesis, a geometrical tetrahedron having four perfectly flat surfaces, each an equilateral triangle. Nor are we to expect a geometrically exact tetrahedron, even if we imagine the water drawn off and nothing left but the solid earth, that is, the lithosphere. No; the hypothesis means a deformation tending in this direction. But Mr. Green's conception attracted but little solid scientific attention, being regarded perhaps as too grotesque for serious consideration. More recently, however, Mr. J. W. Gregory has recalled attention to this view in a paper read

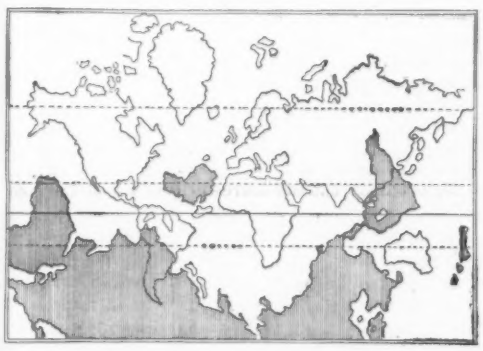

Fig. 2.—Mercator's projection showing antipodal "shadows" which would be drawn upon the globe by the opposite ends of lines passing through the center of the earth from points on the coasts of land surfaces.

before the Royal Geographical Society. The present article will, in the main, and without being exhaustive, set forth arguments there brought forward.

First, consider the regular tetrahedron of geometry. There are four equal faces, each of which is an equilateral triangle, Fig. 1. It is the regular geometrical solid which has the least number of faces, that is, four. The cube, which is the next simplest—being formed of squares—has six faces. Now, the sphere is the solid which has the smallest surface with a given volume. The regular tetrahedron, on the contrary, is



Fig. 3.—Tetrahedron projecting through sphere.

that regular solid which has the greatest surface with a given volume. By referring to the figure, it will be observed, too, that every vertex is opposite a face and *vice versa*. Further, the nearer one goes to the center of a face, the nearer he will approach the center of the entire solid.

Now, if the solid rocky mass of the earth—the lithosphere—were of such a form, gravitation would increase as one approached the center of each face, as such a course would bring him nearer the center of gravity. Consequently, water lying on such a surface would tend to collect at the center. However, the form of the exterior surface would be approximately spherical. And the deepest points of such oceans would be at the centers of the triangular faces. Now, our earth does not present precisely the aspect suggested. But, on the other hand, let us consider some of the facts.

If we refer to a geographical globe, or even to a plane map of the world, we shall see that the hemisphere north of the equator contains nearly all the land, and the hemisphere south nearly all the water. This is a tremendous fact in geography, and has probably arisen from, at most, a few causes. If we follow the northern boundaries of Asia, Europe, and North America, we shall find that there is an almost unbroken zone of land extending around the earth. Thus, North America and Asia are separated by an insignificant distance. Continuing eastward, we find land without a break until we pass from Europe to Greenland *via* Iceland. Here a moderate stretch of sea intervenes between Scotland or Norway and Iceland. But this break is only apparent. There is in reality a ridge—now submerged—connecting Iceland and Scotland. There is thus a ridge circling, almost if not entirely without breaks, the lithosphere along moderately high parallels of latitude. From this the continental land masses depend in three groups—North and South America, Europe and Africa, Asia and Australia—thus accounting for almost the entire land surface of the globe.

Consider now another great fact in geography. The continental masses are, roughly, triangular masses or combinations of triangles, the bases being toward the north. North America and South America are evidently triangles thus arranged. Europe—including Iceland and the British Isles—may be regarded as a triangle, or better perhaps as a series, with the vertices in the Mediterranean Sea. Africa needs no comment. Asia tapers off in the peninsula of India and in the Malaysian peninsula and islands, etc. Australia has its triangular vertex in the island of Tasmania. The Arabian peninsula is to be included with Europe, as will now be explained. From the Arctic Ocean to the Caspian Sea Europe is depressed. Then from the Persian Gulf there is a depression which almost enables a connection to be made with the Caspian Sea. By dividing the land mass Eurasia along the neighborhood of the meridian, 50 deg. E., the Arabian peninsula will fall to Europe, forming the vertex of a triangle having for its base Iceland and the Arctic shore of Europe. To view Asia as a single great triangle, the vertex is to be placed in the neighborhood of Java and Celebes. The Philippines would be included in this Asiatic triangle. The base of the Australian triangle is north of the continent itself, as certain of the islands in that direction belong to the continental platform, of which Australia itself is merely the largest portion extending above the sea level. Greenland is to be included with North America.

With the exception of the land lying in the Antarctic Ocean, we have thus accounted for nearly all the prominent protuberances of the lithosphere. That is to say, almost the whole of the prominences may be regarded as separable into three groups of two triangles each. Each group consists of a northern and a southern section; and all six triangles have their bases to the north and their vertices to the south.

Further, between the two triangles of each group is a marked separating depression. In the New World this depression is the basin of the Caribbean Sea. It might be thought that a consideration of the Rocky Mountain highland with that of the Andes would prohibit the idea of a severance. But it is held that these two mountain systems do not constitute in effect a single chain—what might be looked on as connecting links being short ranges running from east to west, instead of north to south. The Euro-African combination is separated by the Mediterranean and Red Seas. The remaining combination of triangles is divided by a deep channel known as Wallace's Line, which cuts in between Asia and Australia, throwing Java and Celebes and the Philippines to Asia and New Guinea to Australia.

Now, these are marked features of the lithosphere, and stand out conspicuously upon even a superficial examination. They are to be explained by some great fact of the earth's history.

But let us turn now to consider the depressions on the surface of the lithosphere. These are prominently marked out by the three great oceans. These are also triangular, but with their bases to the south and their vertices to the north. Thus, the great basin of the Pacific constitutes one immense triangle, its two sides sloping to the vertex at Bering Strait. The Atlantic forms two triangles. One has its base in the region of the Antarctic Circle, and tending to a vertex between the eastern projection of South America and the western projection of Africa; the other triangle has its vertex between Greenland and Iceland, for we must remember the ridge sloping to the northwest from Scotland to Iceland. The Indian Ocean with its base, or bases, along the Antarctic Circle tapers northward to the Arabian Sea and Bay of Bengal. All of these triangles have their bases to the south and running east and west, with their vertices to the north.

Fig. 4.—How the earth would appear as a tetrahedron.

Thus is accounted for nearly the whole of the sea. We have to add that the three oceans are connected at the south. The triangular depressions correspond then to the triangular elevations. There are three main divisions of each. The one set has its bases practically connected at the north with its extremities to the south. The other reverses these conditions.

A further fact in geography, and which is a notable one, consists in the antipodal relation of land and water. If we imagine a diameter running through the earth, one extremity being, say, at Cape Hatteras,

Fig. 5.—Europe as it is.

the other extremity will of course be the antipodal point of this cape. Suppose now that the American end of this diameter moves along, tracing out the continent of North America. The other extremity will, of course, trace out a reversed North America on the opposite side of the globe. If this process be carried out for all the land surfaces, we shall find that, with the exception of the southern part of South America (perhaps one-third of the entire area), these antipodal shadows lie in the oceans, Fig. 2. There is no other

Fig. 6.—Europe as it will be.

considerable exception, unless the Arctic and Antarctic regions shall be found to furnish them. This would seem to be a remarkable fact. The correspondence is such as must be expected to arise if the causes of depression of an ocean bed on one side of the earth should react through to the opposite side and cause there an elevation—not so great, perhaps, as the de-

pression, as some of the pressure would radiate off in other directions, and thus lack conspicuous expression.

Now, the tetrahedral hypothesis proposes to explain some, if not all, of these large facts. It is assumed that a more or less solid crust was formed, the earth being still, perhaps, in an approximately spheroidal form. If the interior goes on contracting, the external shell will be too large. But it is possible that it be maintained at the same size and with a smaller content if arranged in a form different from the spheroidal. One of the best of the forms permitting the same shell with a diminished interior is the regular tetrahedron. Perhaps this was not assumed at once, as at first the contraction would not be sufficient to demand a form having a fixed surface with a minimum interior. And perhaps the facts do not demand a consummation as yet.

Assuming that there is existent a well-advanced tendency of the lithosphere—not including the water—to take this form, we shall be able to explain some of the facts.

For the oceans would lie one on each face, with their depths in the center. They would be four in number. This would seem to agree with the requirements, if we postulate the Arctic Ocean as covering the region of the North Pole. If these did not fill their basins, the portions of the tetrahedron protruding would form the continents, each continent consisting of a corner with portions running off along the three edges meeting there. If the amount of water forming the hydrosphere were sufficient to cause each ocean to overflow the three sides of its containing triangle, but not enough to cover the corners, then we should have them all connected with each other, and each somewhat triangular in shape. The continents would be four in number and triangular in shape, Fig. 3. These would correspond to (1) North and South America, (2) Euro-Africa, (3) Asia-Australia, (4) Antarctica. To this it may be objected that North and South America constitute, not one triangle, but two. Likewise with Nos. 2 and 3. In reply to this, it may be suggested that we are not to assume that the tetrahedral tendency has reached completion. There may be at present more than four faces.

It will be observed that, since in a regular tetrahedron a corner lies opposite to a face, the continents are antipodal to the oceans, Fig. 2.

It is, perhaps, time for us to state distinctly just where on our present earth we may conceive the various corners to lie. First, we place one corner in coincidence with the South Pole. We thus account for Antarctica and the Arctic Ocean opposite. The three remaining corners we arrange thus: one on the Labrador peninsula, another in Scandinavia, and the third in Manchuria. They are thus not far from 120 deg. separated from each other. There are geologic reasons for this disposition. The rocks of these regions are of the most primitive character and of great extent, seemingly fitted to become the foundations of great land areas.

Now, it might be thought that if this hypothesis of a tetrahedral earth be true, we should find some evidence of a ridge running from corner to corner. By examining a map of North America, it will be found that there is such a ridge extending from east to west in the neighborhood of 50 deg. N. latitude, the rivers on each side flowing in different directions. In Asia extending across from east to west is a divide sending the rivers to the north of it to the Arctic Ocean. It may be that the Telegraphic Plateau in the North Atlantic is to be regarded as evidence of such a ridge connecting Scandinavia and Labrador.

As to the ridges extending from the northern corners toward the South Pole, the three double continents themselves supply evidence. Now, it might reasonably be thought that the divergence of the three ridges from each of the northern corners would give rise to a confusion of river flow. And the facts are in fair agreement with this. Also, it might just as reasonably be supposed that farther south—since the ridges are separate and extend north and south—there would be water flow to east and west. In South America this is the case. Likewise, Africa corresponds well to this requirement. Australia exhibits, perhaps, no very clear evidence.

Consider now the triangle formed by the three northern corners and their connecting ridges. With certain exceptions to be mentioned later, the principal mountain ranges in the north are parallel to these ridges. Thus, in Asia we have the Himalayas extending roughly from east to west. In Europe the same may be said of the Carpathians, the Alps, and the Pyrenees. The Ural Mountains, the Rockies, and the Appalachians are apparent exceptions. But these are said to belong to a different era of mountain formation.

There is another line of evidence which may be thought to have some bearing. This is in reference to polar flattening of the earth. This flattening was suspected because in 1672 a clock which was known to be a correct time-keeper in Paris was observed to lag two minutes per day in French Guiana. If a terrestrial radius in the latter locality were longer than one at Paris, this loss might be accounted for, since in the one case the strength of gravity would be feebler than in the other, thus causing the clock to run more slowly. By actually measuring a degree of latitude in a far northern country and again near the equator, certain French astronomers were able to show, from the fact that the former was longer, that the earth was flattened at the North Pole. By carrying out the same process at the Cape of Good Hope, it was shown that there was flattening at the South Pole also. Now, these facts can be explained—and adequately, perhaps—by the oblateness induced by rotation when the earth was in liquid and plastic stages. But it has been shown that the southern flattening is not so great as the northern. Here is where the tetrahedral hypothesis enters with its Arctic depression and Antarctic elevation.

Now, it is quite possible, perhaps, that this hypothesis can not be made—in its present form—to explain everything, and can even be made to appear inconsistent with facts. But that would not necessarily mean that it is not a step in the right direction, containing a germ of real truth. Perhaps it may need modification. However, until the logic of inescapable facts intervenes, this may be looked on as a tenable and possible, though perhaps not complete, explanation.

BELIN'S IMPROVED APPARATUS FOR THE ELECTRICAL TRANSMISSION OF PICTURES.

(*Concluded from page 440.*)

are made *n* times larger or smaller than the corresponding parts of the transmitter, the copy will be correspondingly enlarged or reduced, but it will always remain as sharp as the original because the aperture is in contact with the film.

It was necessary to make some other additions to the primitive apparatus in order to allow the operators to exchange signals. For this purpose a system of bell signals is employed, operated by the synchronizing relay and a switch which connects the line either with a call or with the photographic apparatus, like the switch moved by the hook of the telephone.

In the recent experiments between Paris and Lyons the sender called up the receiving station by a prolonged ringing and the receiving operator replied with three short rings, and then waited until the sending operator had started his apparatus. The movement of the apparatus was indicated at the receiving station by a series of rings, the frequency of which increased with the speed of the motor, and gave to the operator an idea of the speed to be employed, while his commutator enabled him to obtain perfect synchronism. Then the photograph was transmitted in the manner above described.

M. Belin sent a portrait from Lyons to Paris in 5 minutes and 20 seconds, and a landscape photograph was then sent from Paris to Lyons in 9 minutes and 15 seconds. At the end of each transmission the circuit was broken and both operators were informed of this fact by the return to zero of the needles of their amperemeters.

It is not, however, necessary for the operator to observe the needle, as the motor simply goes on and when the cylinders have arrived at the end of their course they continue to rotate without advancing.

Lightning arresters and fusible plugs are added to each station.

M. Belin expects soon to repeat his experiment between Paris and London, Vienna and Rome. The object of the tele-stereograph is to reproduce not only photographs and half-tone pictures, but also all designs in black and white, including writing, printing, engraving, and process engraving. For this purpose the apparatus can be simplified.

At the transmitting station the lever, the wheel, the rheostat, and the resistance coils are omitted. Their place is taken by a simple and quick acting interrupter. The apparatus becomes, in fact, a Morse key worked automatically. At the receiver the graded screen is replaced by a narrow slit in a diaphragm placed before the lens. The transmitter is so arranged as to close the circuit when the tracing point enters the depressions, and to break it when the point passes over the raised lines. In this method, which is necessary for line drawings, the result is independent of the height of the relief. At the receiving station the luminous pencil may be arranged to fall upon the slit when the current is closed and to move away from it when the circuit is broken, or by a simple adjustment of the oscillograph, the rays may be thrown upon the slit when the circuit is broken and away from it when the circuit is closed. In the former case the lines of the original picture are represented in the copy by white lines on a black background; in the latter case they appear as black lines on a white ground. Either method may be used according to the object in view and also according to the direction of rotation of the cylinder, by which the direction of the lines may be reversed.

It is evident that when the apparatus is thus used for transmitting writing and line drawings by simply opening and closing the circuit, its operation is entirely analogous to that of an ordinary telegraph. It may, if desired, be operated by a relay and even by wireless impulses.

As various systems derived from the inventions of Caselli and Meyer have recently been proposed, it is proper to insist upon the fact that Belin's method is entirely new and original. It is not necessary to execute the drawing or writing with insulating ink or with metal foil. A special, rapidly-drying ink may be used on any paper which can be easily stretched over the transmitting cylinder. Hence the new apparatus is a universal telegraphic instrument, since it transmits equally well writing, drawings, and photographs.

Official Meteorological Summary, New York, N. Y., May, 1909.

Atmospheric pressure: Highest, 30.26; lowest, 29.63; mean, 29.93. Temperature: Highest, 83; date, 14th; lowest, 40; date, 2nd; mean of warmest day, 74; date, 15th; coolest day, 46; date, 2nd; mean of maximum for the month, 68.0; mean of minimum, 52.8; absolute mean, 60.4; normal, 59.8; excess compared with mean of 39 years, 0.6. Warmest mean temperature of May, 65 in 1880; coldest mean, 54 in 1882. Absolute maximum and minimum of May for 39 years, 95, and 34. Average daily excess since January 1, 2.2. Precipitation: 1.72; greatest in 24 hours, 1.22; date, 21st and 22nd; average of May for 39 years, 3.29. Accumulated excess since January 1, 0.23. Greatest precipitation, 9.10, in 1908; least, 0.33, in 1903. Wind: Prevailing direction, northeast; total movement, 9,169 miles; average hourly velocity, 12.3; maximum velocity, 48 miles per hour. Weather: Clear days, 7; partly cloudy, 11; cloudy, 13; on which 0.01 inch or more of precipitation occurred, 11. Thunderstorms: 1st, 6th, 14th, 28th. Dense fog: 1st, 9th. Mean temperature of the spring, 49.40; normal, 48.73. Total precipitation of the spring, 10.84; normal, 10.69.

Ozonizing a City's Water Supply.

The water supplied to Nice (105,000 inhabitants) and several smaller French cities is now purified by ozone, in addition to filtration. The following method has been adopted by the city of Chartres (24,000 inhabitants). The water is pumped from the river Eure into sedimentation basins which are contained in a building of ferro-concrete, with a double roof which keeps the water fairly cool in summer and prevents it from freezing in winter. The building has windows of yellow glass, yellow light being unfavorable to the development of bacteria. In these basins about 1,600,000 gallons of water are clarified in 24 hours. The water flows thence through coarse coke filters and fine sand filters to the ozonizing apparatus. The coke filter beds are cleaned, when they become choked, by exposing them to the air and washing away the oxidized impurities with a current of water. The sand filters are cleaned by powerful jets of compressed air and water, directed upward.

The ozonizing plant is constructed in duplicate, so that one section is always ready for use. The water trickles down through four beds of pebbles which have an aggregate thickness of 14 feet and are supported by perforated floors in a tower, at the bottom of which ozonized air enters under pressure. The ozone generator is a cell of glass 6 feet long, 3 feet wide and 6 feet high. It contains five elements, each composed of three cast iron plates. The middle plate is connected with a transformer which furnishes an alternating current of 20,000 volts; the outside plates are connected to earth. Between the iron plates are glass plates covered with tinfoil. Ozone is produced by the alternating electric discharges between the plates. The outer iron plates are perforated to allow the ozone to escape, and the middle plate is cooled by a current of water from a tank insulated by triple bells of porcelain. Air is forced into the generator under a pressure sufficient to carry it, laden with ozone, through the water tower. One grain of ozone is used for 8½ gallons of water. The primary circuit of the transformer is connected with an alternator which produces a monophase current of 250 volts and 500 cycles. It is of interest to note that the price charged for water, about one cent for 44 gallons, has not been increased since the installation of the ozonizing plant.

British Patent Law Opposed.

The Lord Chief Justice, Baron Alverstone, delivered an address on May 28th before the section of the International Chemistry Congress which is dealing with legislation affecting chemical industry. He spoke strongly against the revoking clause of the new British patent law, saying he considered it a backward step which would result in people keeping their inventions secret. The scientists present were unmistakably hostile to the British patent law, and a resolution was unanimously adopted recommending that committees of the various countries adhering to international conventions agitate in favor of a general understanding providing that manufacture in one country belonging to the union protects the patentee against the revocation of his patent in other countries of the union.

Correspondence.

THE NUMBER OF OUR ANCESTORS.

To the Editor of the SCIENTIFIC AMERICAN:

Your correspondent who figures out that each of us had 1,424 ancestors ten generations ago must be an only child. It is so naive a statement to make that each person living has two parents and each parent had two, etc.

He forgets that the figuring is more apt to be the other way. Ten generations ago a couple got married. They had four married children, and each child had two children that married, etc. Thus in the present generation there will be living 1,424 descendants of the original pair. When speaking of human beings, it is polite to say couple, and not pair, of course.

According to his way of thinking, the world at some time in the past must have been densely populated. History does not show this. On the contrary, history tends to show that the increase in population is such that it very nearly doubles in each generation. The ancient wise men who considered that the population of the world started with one couple were simply men who observed and applied facts. Your correspondent runs away with himself, and a little sober thought would show how absurd some of his ideas are.

Chicago, Ill. ERNEST MCCULLOUGH.

IMPRESSIONS OF AMERICAN INVENTORS.—II.

THE WRIGHT BROTHERS AND THEIR ACHIEVEMENTS.

It must indeed have been a proud moment for Orville and Wilbur Wright when they received from President Taft—a native of their own State—the gold medals of the Aero Club of America and the thanks of this great nation for having solved the problem of all ages—flight. With the presentation of these medals on June 10th, and with that of the Smithsonian and Congressional medals a week later, has come to them at last the recognition that is seldom accorded a prophet in his own country, and that was several years late in being given in this instance. As a result of this tardiness, France has thus far witnessed the greatest flights yet made by either of the two "birdmen"—those of Wilbur Wright—although Orville Wright's flights at Fort Myer, near Washington, last September, were excellent in every particular, and will doubtless be duplicated and surpassed by the younger brother in the coming tests to occur at the same place within a few days. The longest flight made here last year was 1 hour and 15 minutes on September 12th last; while Wilbur Wright's record is 2 hours, 20 minutes, and 23 seconds at Le Mans, France, on December 21st, 1908. Besides this Wilbur Wright holds the record for height, having flown over a line suspended at a height of 360 feet above ground. As far as speed is concerned, the Wright aeroplane has flown in an official test at the rate of 38 miles an hour. Several French monoplanes have surpassed this figure slightly, the fastest speed so far attained being about 45 miles an hour. But when the matter of stability is considered—especially in a transverse direction—the Wrights have so far beaten all other experimenters. By warping the two main planes of their machine, they can vary the angle of incidence, obtaining a greater lift on the low side and a diminished lift on the high, and thus quickly bringing the aeroplane back to a level keel. The fore-and-aft stability is maintained by means of a double-surface horizontal rudder mounted well out in front. The equilibrium in both directions is maintained manually; but it is probable that in the near future the brothers will find a way of accomplishing this important function by some automatic means.

The two modest Americans whose portraits appear on our frontispiece have probably received more attention from royalty during the past six months than any other of their countrymen who have been abroad of late. While at Pau, France, last spring they were visited by King Alphonso XIII. of Spain and by King Edward VII. of England. They also made flights at Rome in the presence of King Victor Emmanuel, while in August they expect to go to Germany and fly before the Kaiser.

Both brothers are as modest and unassuming as their photographs indicate. Wilbur, the elder, is rather quicker and more positive than Orville, and generally speaks in short, quick sentences, giving his opinion in a few words. At first sight he strikes one as a typical Yankee inventor, and this idea of him is strengthened when one sees him working upon his machine with his pockets bulging with balls of twine for use in making a quick repair. Both men are extremely careful in making their experiments, and both have a great amount of patience. They always delve to the bottom of any problem they have to solve, and argue with each other at length *pro* and *con*. As their only sister, Miss Katharine, so aptly puts it, "To hear them argue around and knock the bottom out of each other's ideas till, at the end of three hours, you find Orv where Wil started off and Wil where Orv began, is just the killingest thing imaginable, and makes them both burst out laughing—but it saved them no end of useless experiment." And according to the testimony of a man who studied them while they were at work at Pau, hardly a flight was made but what some new problem was presented or solved, so that they are still making improvements.

The story of how the two brothers conceived and perfected their aeroplane has been told often; but perhaps a brief retelling of it would not be out of place here. Receiving their first interest from a toy flyer of the Frenchman Penaud, which their father brought home one time when they were boys, they some years later were stirred by the tragic death of Lilienthal (who was killed by a fall with his glider in Germany) and they determined to take up the problem of flight where he laid it down. They read all of Lilienthal's writings, and became acquainted with Mr. Octave Chanute, a mechanical engineer of Chicago, who had carried on some experiments in gliding flight. They built a glider of their own, and experimented with it during a few weeks each summer on the huge sand dunes of the North Carolina coast. They developed a method of gliding by lying flat upon the lower plane, and controlling the glider in an up and down direction by means of a horizontal rudder rigged out in front. Later they solved the problem of lateral stability by a method of warping the planes which they devised and patented. They attained great skill in gliding flight, and consequently were not much surprised when, on December 19th, 1903, they were able to fly half a mile at the fourth attempt, after fitting a specially-built aeroplane with a gasoline motor. There were many problems to be solved, however, after this first power flight, and with the inadequate facilities offered by their small bicycle shop in Dayton, as well as the lack of funds with which to experiment, nearly two years more were spent before they felt that they had really solved the problem. But they were too early at that, for the U. S. government refused to have anything to do with aeroplanes and the French people had not yet become enthusiastic. Two years more elapsed before our War Department finally gave out specifications for an army aeroplane, and owing to the unfortunate accident to Orville Wright's machine when in flight on September 17th last at Fort Myer, the fulfillment of the tests required is only now about to take place. Orville Wright will conduct the machine, and will make the first cross-country flights the brothers have ever attempted.

When one considers that the two brothers not only built a successful aeroplane, but that they constructed several gasoline motors—in which art they were quite inexperienced—as well, one can partially realize what great credit is due them; for six years ago the best automobile gasoline motors were weighty and cumbersome, while such a motor for an aeroplane had hardly been thought of. That they were able to build a sufficiently powerful and light motor to make their aeroplane fly at this time is another side light on their genius. Not only did they make several fairly light motors, but they also developed a propeller for testing these, and a device whereby they could read the horse-power while the motor was running. Owing to the degree of perfection to which they had brought their aeroplane surfaces—which was reached only after numerous experiments with models—the two brothers were enabled to fly with about half the horse-power required by other foreign experimenters, a 25 to 30-horse-power motor being sufficiently powerful for their needs. Nevertheless, their first motors weighed about twice as much per horse-power as those they are using to-day.

The making of such long flights as 2 hours and 20 minutes, and the carrying of a heavy passenger at other times, augurs well for the eventual commercial use of aeroplanes, though the Wrights themselves do not believe they will ever be largely used in this way. Their aeroplane is ordinarily started by being shot from a catapult, but once in Rome it rose in the air with its own power, after sliding on its runners over the grass. If mounted upon wheels, it could readily do this upon suitable ground. Probably a combination of wheels and runners will eventually be used.

Dirigible Balloon Progress.

The recent partial success of the "Zeppelin II," of the moral of which we shall have more to say next week, renders timely the article presented in the current issue of the SUPPLEMENT describing the practically identical "Zeppelin I." The "Zeppelin II" is so called because, if accepted by the German military authorities, it will be the second war dirigible; but it is actually the fifth large dirigible balloon built by Count Ferdinand von Zeppelin on similar lines, his experience resulting only in modification of detail.

The "Zeppelin II" left its floating shed on Lake Constance late on Saturday night, May 29th, with the supposed object of sailing to Berlin, which, however, Count Zeppelin has since disclaimed. Berlin lies a little east of north from Friedrichshafen, the home of the balloon, and its course as far as it went was straight in that direction, and apparently quite independent of the wind. It passed over Treuchtlingen early on Sunday morning and Nuremberg two hours later, reaching Bayreuth at 10:30 A. M., Zwickau at 2 o'clock, and Leipzig at 5:20 P. M. At Bitterfeld, a few miles farther and 465 miles from its starting point, the Count decided to return, as he had lost some gas, and estimated that the return journey would take fifteen or twenty hours. The balloon was next reported at Schweinfurt at 3:30 A. M. on Monday, over Wurzburg at 5 A. M., and Heilbron at 8:10. At Goppingen, half an hour after passing Stuttgart, a descent was made to replenish the supply of fuel, which was nearly exhausted. The motors had already stopped, and the airship was nearing the ground in an open field, when a gust of wind carried it against a tree with considerable force. The prow of the balloon was crushed in for a considerable distance, nearly to the front end of the "gondola" below, and the aluminium stays were entangled in the branches.

It is most regrettable that so remarkable a voyage should have been marred by an accident, serious in its results to the balloon but so trifling in its cause, the weather conditions being in no way worse than the airship had successfully negotiated for the previous thirty-six hours. A cruise of 850 miles in that time, however, is alone sufficiently remarkable.

Temporary repairs were made in twenty-four hours, which enabled the balloon to return to Friedrichshafen under its own power, this fact alone testifying to the merits of Count Zeppelin's "compartment" system, without which the damage done to the prow would have been sufficient to entirely incapacitate the airship. Permanent repairs will take probably six weeks.

We present in the current issue of the SUPPLEMENT a complete diagram and description of the first German government Zeppelin airship, known as "Zeppelin I," together with a critical consideration by a prominent aeronautic authority of the merits and demerits of the rigid type of construction as compared with the semi-rigid and non-rigid systems.

Airship Budgets of the Great Powers.

A note addressed to Parliament by the British War Office contains a comparative statement of the sums expended in 1908 by the governments of the principal nations of Europe in the construction of airships and the prosecution of experiments in aerial navigation. The approximate amounts, in American money, are: Germany, $1,900,000; France, $225,000; Austria-Hungary, $26,000; Great Britain, $25,000.

The German government contributed $1,250,000 to the Zeppelin fund, expended $510,000 in the purchase of Zeppelin airships, and $125,000 for the pay and maintenance of the balloon corps. France spent $34,000 on aeronautical schools, pay, and experiments, $57,000 for material and construction, and $135,000 for the maintenance of existing airships. Austria-Hungary spent $14,000 for schools, pay, etc., and $12,000 for airships. Great Britain spent $9,500 for dirigible balloons and $2,500 for aeroplanes. These figures are official and therefore not open to question. London newspapers comment bitterly on the fact that Germany spends nearly eighty times as much as Great Britain for the creation of an aerial navy.

The Current Supplement.

The opening article of the current SUPPLEMENT, No. 1745, discusses the subject of the Comparative Practical Efficiency of Various Types of Gas Lamps. The author, Mr. R. C. Ware, is a well-known authority on the subject. A detailed description of the Bellini-Tosi System of Wireless Telegraphy is given, together with an account of the radio-goniometer, which is the basis of the system. For some time past the German government has been practically testing a new system of issuing railway tickets, which dispenses with the necessity of retaining large stocks of printed tickets for each of the stations served from that center. Instead, the ticket is printed upon demand by means of a machine which is described in the current SUPPLEMENT. An Automatic Gate for Grade Crossings is described and illustrated. Jacques Boyer writes on Watercress Culture in France. The Coal-Tar Dye Industry and Its Importance is reviewed. A complete detailed description of the Zeppelin airship also appears.

A Prize Competition.

The eighth regular prize competition of the Austrian Engineers' and Architects' Society has been announced. A solution is asked for the following question:

"How is it possible to avoid the injurious effects of the so-called higher harmonics of current and voltage waves which permanently or temporarily enter the alternating circuit; or how may their production be generally prevented?"

Three prizes are offered, the amounts being $600, $200, and $100. Persons who desire to obtain further particulars and to ascertain whether they are eligible to enter the competition, should address: "Oesterreichischer Ingenieur und Architekten-Verein," Eschenbachgasse 9, Vienna, Austria.

EXPERIMENTS WITH HYDROPLANES OR SKIMMERS.

BY THE ENGLISH CORRESPONDENT OF THE SCIENTIFIC AMERICAN.

The results of a careful series of experiments with models of this class have been published by Sir John I. Thornycroft, F.R.S., the well-known British naval architect. Special arrangements were adopted in the carrying out of these investigations. A small pond served as the towing tank, with requisite equipment in a small laboratory at one end for towing the models at varying speeds. Through the courtesy of the experimenter we are enabled to publish herewith a series of photographs showing the tests in progress. The results of the investigations were communicated by Sir John Thornycroft to the Motor Yacht Club.

Though the generic term "hydroplane" is adopted to individualize those vessels which greatly reduce their displacement when traveling at high speeds, Sir John Thornycroft points out that this use of the word is not correct, inasmuch as the surfaces on which they glide are not always planes. He prefers the designation "skimmers." The skimmer is no modern evolution of marine handicraft. As a matter of fact, it is very ancient, and is still in use among many of the islanders of the Pacific, among whom it performs useful service. These skimmers are extremely crude, representing as they do the hydroplane in its simplest form. They comprise a single slab of wood rounded at the extreme ends. In the manipulation of these "surf-boards," as they are sometimes called, the natives are extremely adept. Standing upright or lying prone on the primitive support, they can dexterously "coast" down the waves at high speed.

But to make a boat glide steadily along the surface of the water is by no means so easy. Steadiness can be attained probably by using a number of planes, but this is likely to increase the frictional resistance. When a number of planes are used to support a given load, each must be of less length than when only one is used. The friction per unit of surface being greater for small surfaces, it is improbable that a smaller total surface will be sufficient, and the necessary power required for a given speed must be more.

Mr. Froude, who carried out elaborate experiments in the same field, advanced the opinion that the best results could be obtained from a single plane, held at a particular angle to the water surface. He built a model on which three surfaces were attached to a frame, and towed in such a position that the wake of either of the three did not interfere with the water on which any one of them had afterward to run. He also proved by theory that the angle made by the plane with the line of motion should be such, that the resistance due to surface friction should be equal to the resistance due to gravity, or the horizontal component necessary to balance the weight of the vessel on the incline of the supporting surface.

This inclination he found to be about 1 in 14, so that the total resistance amounts to about one-seventh of the weight of the displacement of the vessel. This friction, however, depends on the value to be attached to the surface friction, which again varies with the character of the surface and the length of the rubbing surface. Mr. Froude ascertained in the course of his experiments with the Ramus model that at the front plane lifted entirely above the water surface as the speed was increased, the center of gravity apparently overhanging all natural support. It is evident that this effect can be produced only by having the pressure on part of the surface less than the atmospheric pressure. Sir John Thornycroft carried out some experiments to illustrate this effect by means of a model, the bottom of which for the most part was a simple plane, but the after surface of which could be turned at right angles. The result of this design was clearly shown by the model's jumping clear of the water surface.

When the bottom surface of the model was left flat throughout its length, it glided smoothly over the water, but when the tail part was bent down, it very promptly dived. From the result of these experiments it appears that the endwise vertical section of the bottom of a skimmer or hydroplane should be a straight line, although, as Sir John Thornycroft points out, a hollow curve would seem to promise a more even distribution of pressure on the bottom.

A number of factors must be considered in the evolution of a boat intended for skimming or sliding along the surface of water with the least possible disturbance, and the problem is rendered more complex from the fact that these do not all lead to the same proportions in design. The lifting force depends on the amount of surface and speed, while the friction for a certain amount of surface will decrease with greater length; but the speed at which skimming will take place must increase with length. Below a certain velocity the performance of a skimmer model is very bad, owing to the formation of large waves, which allow the stern to fall and greatly increase the angle of the planes, thereby rendering it more difficult for the vessel to mount to the surface and to skim.

This difficulty he found to be capable of being lessened, either by extending the amount of the supporting surface or by reducing the weight of the vessel, the surface remaining the same. The reduction of weight, however, is a difficult matter, because of the degree of strength necessary to withstand the shocks to which this type of boat is subjected. The speed at which skimming commences, however, should be kept as low as possible. If the boat is short and wide it leads to excessive air resistance, which becomes quite important at speeds of about 30 miles per hour. Consequently, one must not resort to too great a width.

When a skimmer is moving below the skimming phase, the wave formation resembles that of an ordinary vessel, but the waves are larger in proportion to the size of the vessel and diverge at a wide angle. The contrast is strikingly shown when the same model is made to travel fast, since then the volume of the waves is much less and the angle divergence is small. An important point in order to achieve the best result is the position of the center of gravity. In the course of his experiments Sir John Thornycroft found with his models that improvement appeared to take place as this was moved aft, until skipping or flapping commenced. Though this dancing motion may become dangerous, still the best results seem to coincide with its commencement.

Some months ago the Thornycroft Company built a motorboat, the "Gyrinus," which has proved very successful in races, and which differs radically in design from the majority of craft of her class. The vessel has an over-all length of 22½ feet, with a breadth of 5 feet 4 inches and a draft amidships of 8 inches. At the bow the water lines are comparatively full, while the stern is quite flat, finishing in a sharp angle, so that all drag from the water, as mentioned above, is eliminated. This boat has proved most successful in speed contests, and last season carried off the international race for 8-meter vessels. The lines of this craft have provoked considerable discussion, and it has been suggested that they lifted and reduced its displacement to some extent like a skimmer. Photographic records carefully made while she is under full speed refute this contention, since the bow is nearly at the same level at rest or speed, while when moving fast the stern is much lower. The forepart of the boat appears to plow a channel into which the stern falls, and with increase of speed the resistance rises very rapidly, although the form of stem would seem well adapted to avoid this result. Because the lines of this motor boat rise very gently and terminate in a sharp angle, there is no surface which can suck up the water, and by so doing reduce the pressure below that of the atmosphere.

The increase of resistance in a skimmer differs markedly from that in an ordinary boat. It rises very rapidly at first with increase of speed, but once the phase of skimming is established, it may fall temporarily and afterward rise only very slowly, so that the power required increases but little faster than the

"Gyrinus" model at moderate speed.

Ramus model at rest.

"Gyrinus" model moving at corresponding speed to about 19 knots.

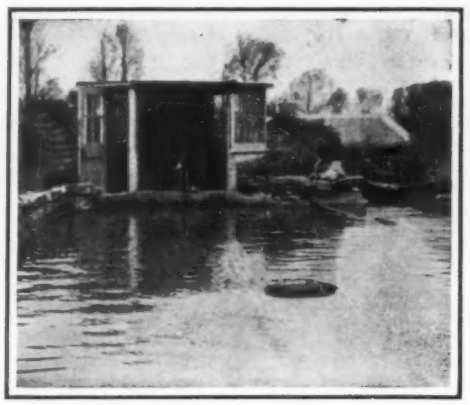

A very beamy Thornycroft model at high speed showing very small surface disturbance.

"Gyrinus" model towed backward to illustrate loss of pressure on cruiser stem and stern at high speed.

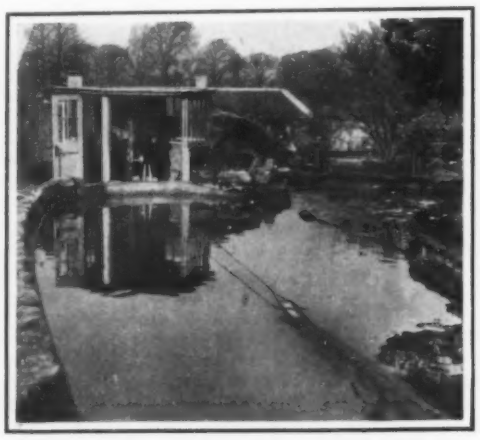

Ramus model jumping.

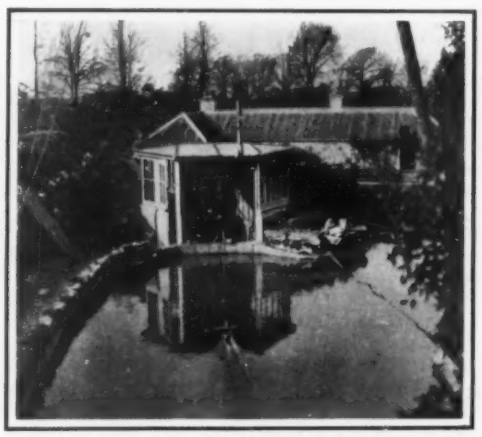

Ramus model; steady motion at high speed.

EXPERIMENTS WITH HYDROPLANES OR SKIMMERS.

velocity. This was conclusively shown by experiments made with a model of the above motor boat and a Ramus skimmer model of the same weight. The plotted records showed that the resistance curves crossed at approximately 17 knots. For lower speeds the boat form is much superior, but above the point where the resistances between the two models are equal, the skimming model possesses decidedly greater advantages.

Thornycroft also carried out a series of experiments with the model of the "Gyrinus" motor boat towed backward, in order to illustrate the clinging of the water around the rounded form of stern, which the bow then represented; and although this gave no trouble at ordinary speed, the effect at extreme speeds was found to be surprising. The real stern lifted, while the bow was depressed until the model made a large angle with the line of motion, as was found to be the case by Mr. Froude with his Ramus model.

Sir John Thornycroft also studied the passage of air underneath skimmers. It is generally supposed that air does pass beneath them when traveling at high speed, but he contends that this is only likely to occur when the water surface is broken, as it is well known that a jet of water impinging on a surface even at an acute angle does not all pass under in the direction of the jet. A small part near the surface has its motion reversed, and renders the passage of any air between the jet and the surface impossible. If, however, the surface of the moving water is broken or churned into foam, then that mixture of air and water will pass along the surface. What will be the effect of this seems uncertain, but the late Lord Kelvin was thoroughly of the opinion that the friction of this mixture would be greater than that of solid water. The form used by M. Fauber is adapted to eject any air from under his vessel, and Sir John Thornycroft thinks it possible that he obtains from this advantages which balance what would appear to be a loss due to the many short skimming surfaces.

In the opinion of Sir John Thornycroft, hydroplanes are closely related to aeroplanes. Although smooth water would seem to form a definite plane on which to travel, a boat of this kind when moving at high speed is not content to be limited to motion in two dimensions, but tends to oscillate vertically and to jump from the water surface, and under some conditions to dive.

Fig. 3.—Cutting "scientific" rubies.

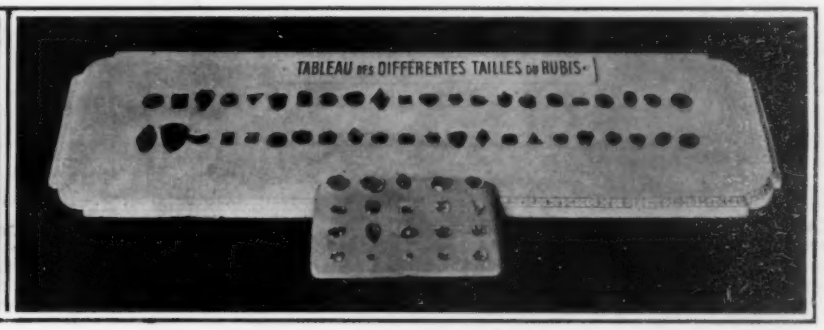

Fig. 5.—Rubies of various shapes.

ARTIFICIAL RUBIES.

BY VICTOR BARTON.

Diamonds are composed of pure carbon, but most other precious stones consist of alumina, colored by various oxides. Hydrated silicates of alumina are known as clays and are found in vast quantities everywhere, but all varieties of crystallized alumina, or corundum, are comparatively rare. Some corundums are colorless, while others derive various tints from the presence of metallic oxides. Red, blue, green, and yellow corundums are used as gems and are known, respectively, as rubies, sapphires, oriental emeralds, and oriental topazes. Rubies and sapphires are by far the rarest and most valuable of these gems.

Many attempts have been made to produce rubies and sapphires synthetically by fusing alumina with coloring oxides and crystallizing the mass by cooling. The first partial success in the synthesis of colored corundum was obtained in 1837 by Gaudin.

In 1852 Ebelmen, director of the national porcelain works at Sèvres, produced rubies of microscopic size by heating a mixture of alumina, borax, and oxide of chromium in a porcelain kiln. St. Claire Deville and Caron succeeded in producing rubies, in the form of very thin crystalline laminæ, by means of the reaction between vaporized anhydrous boric acid and aluminium fluoride. In the course of their experiments they occasionally obtained crystals of sapphire, the formation of which they could not explain, but which were doubtless due to the presence of particles of oxide of iron.

In 1865 Debray and Hautefeuille attacked the problem, but it was reserved for Frémy and his assistants, Feil and Verneuil, to solve it in a series of remarkable researches distributed over the period 1877-1890.

In the method first employed by Frémy and Feil, an aluminate of lead was formed, and this salt was then decomposed by the action of silica, the result being to set free the alumina and to cause it to crystallize. The crystals of corundum thus produced were colorless, but rubies were obtained by adding 2 or 3 per cent of potassium bichromate, while the

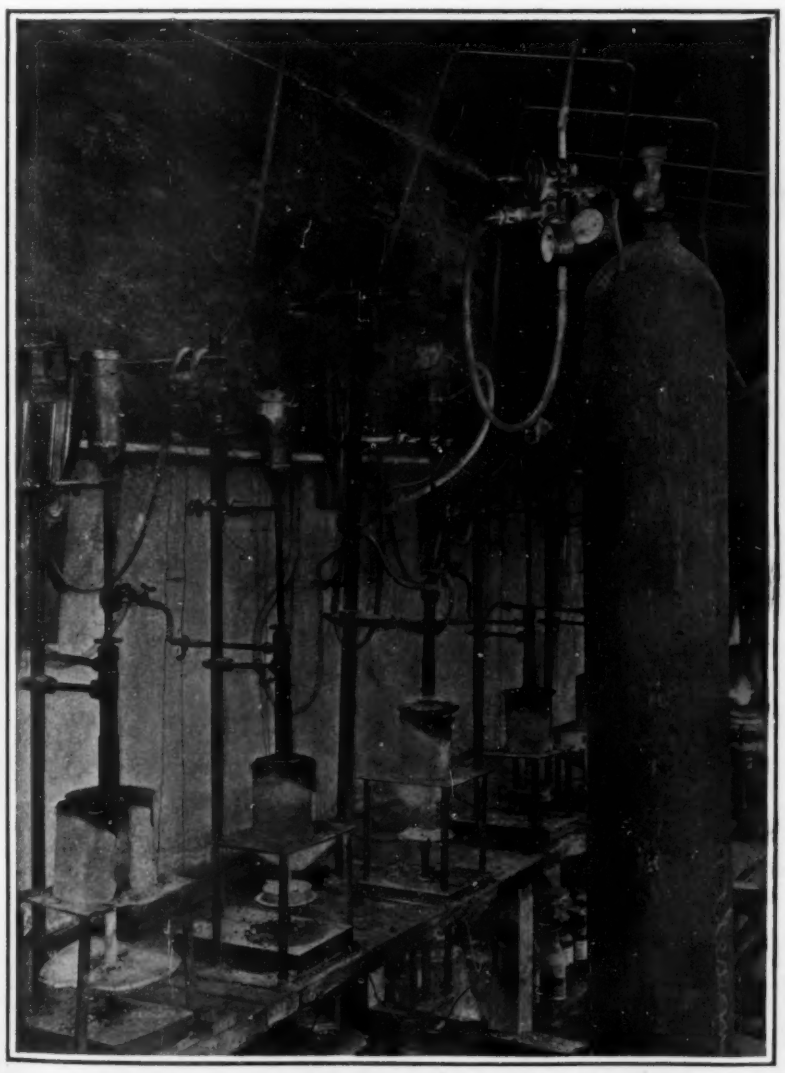

Fig. 2.—Blowpipes and oxygen cylinder in Paquier's ruby factory.

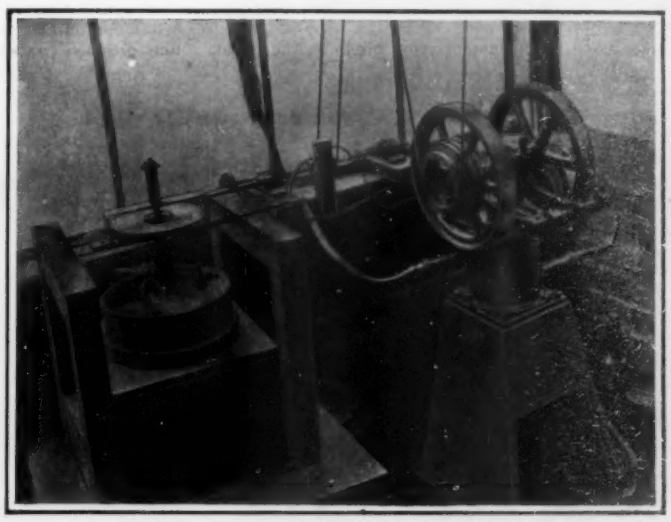

Fig. 1.—Sifting the mixture of alumina and oxide of chromium.

Fig. 4.—Examining artificial rubies, and mounting them on rods for cutting.

further addition of a little oxide of cobalt produced the blue color of the sapphire. These artificial gems, however, were laminated, friable, and of little value as jewels.

In a second series of researches Frémy and Verneuil crystallized alumina at a very high temperature by a process in which potash and barium fluoride were employed. By skillful manipulation and by maintaining a circulation of air in the crucible, they succeeded in producing magnificent rhombohedral crystals, as transparent and brilliant as natural rubies and thick enough to be cut in the rose form. But these crystals were still too small to be employed to advantage in jewelry.

Several chemists conceived the idea of increasing the size of Frémy's rubies by a process of "feeding" analogous to Leblanc's process of increasing the size of soluble crystals by keeping them in the mother liquor, from which additional matter is slowly deposited on them. With rubies the process was conducted, necessarily, in the dry way, the matter being in the fused state and the temperature between 2,700 and 3,300 deg. F. But the operation proved less simple in practice than in theory.

The first "reconstructed" rubies appeared on the market in the early eighties. They were made by fusing ruby chips together, and their artificial character was easily detected by experts. Yet they had a brilliant appearance and sold for $20 or $30 per carat, although they crumbled when they were cut. Large rubies of a cloudy and unsalable character were obtained soon afterward by the chemist Maiche. Meanwhile the inventor of the "reconstructed" rubies, a Swiss engineer named Michaud,* had been compelled by lack of money to sell his secret to a foreign resident of Paris, who sold it in turn to a number of other persons, several of whom formed a company which soon failed. Then some men who had been employed in the work undertook to carry on the manufacture of rubies by the process, which had become public property and which was conducted substantially as follows:

The first small ruby, or nucleus, was placed in a platinum crucible, which was fixed at the center of a rotating disk and exposed to the flame of an oxy-

Fig. 1.—Electrically operated trolley-repairing automobile in service.

hydrogen blowpipe, producing a temperature of 3,300 deg. F. Minute ruby chips were then brought, one by one, with pincers, into contact with the incandescent nucleus, and the process was continued until the mass had attained the desired size. The chips became welded together and formed a mass sufficiently compact and homogeneous to allow of cutting. The work required great skill and the partially amalgamated crystals often cracked in cooling. At first the reconstituted rubies, uncut, sold for $2.40 per carat. About a thousand carats daily were manufactured in Paris and exported to Germany and America, and even to India, whence they sometimes returned, mixed with natural rubies. Competition gradually lowered the price to 6 cents per carat.

The "scientific" rubies have suffered a similar depreciation. These gems first appeared in commerce in 1901. They were made, and are still made by Paquier, Disclyn, and others, by the improved Verneuil process described below.

In the first place, calcined alum is mixed with a small quantity of a salt of chromium, the function of which is to produce the red color of the ruby. The mixture is rubbed through a very fine sieve by means of two stirrer blades driven by a small motor (Fig. 1). The sifted powder is then melted by blowpipes consuming illuminating gas (Fig. 2).

Verneuil found that three conditions must be satisfied in order to produce transparent rubies; the mixture must be exposed to that part of the flame which is richest in hydrogen and in carbon, in which it not only melts but boils and bethcomes purified; the ruby must be built up gradually from the bottom, and the operations of fusion and solidification must be so conducted that the area of contact between the first layer and the support is extremely small, in order to reduce the danger of fracture to a minimum. These conditions are satisfied in the construction and operation of Paquier's apparatus, which is shown in the diagram (Fig. 6). The calcined powder, consisting of alumina with a little oxide of chromium, is placed in a little sheet-brass hopper (*A*), the bottom of which is made of wire gauze of sufficiently fine mesh to retain all particles large enough to obstruct the orifice of the blowpipe beneath. This hopper is suspended by a rod in a chamber (*B*), which is really an enlargement of the oxygen tube. The lower part of the chamber is drawn out into a slender tube, which ends in a fine jet. Oxygen is admitted at *C*. The oxygen tube is surrounded by the coal gas tube, to which gas is admitted at *E*. The flow of gas is regulated to produce a temperature of from 3,300 to 3,600 deg. F. A little hammer, operated by an electromagnet, falls at regular intervals on the top of the rod which supports the hopper, and each blow causes a little of the powder to sift through the gauze bottom.



Fig. 6.—Diagram of apparatus for making rubies.

Thus the powder is thrown, a little at a time, into the current of oxygen which comes into the flame, where it is transformed into liquid drops. Some of these drops fall on a little platinum dish attached to the top of a rod (*K*) and inclosed in a box of fire-clay (*F*) to prevent too rapid loss of heat. The box is provided with an opening through which the formation of the ruby on the platinum dish can be observed. The dish can be moved in any direction by three screws, at right angles to each other, of which only the vertical screw (*V*) is shown in the diagram.

Fig. 2.—The trolley-repairing truck ready to start.

Each drop, as it falls on the dish, unites with the solid mass formed by preceding drops, and thus the ruby increases in size and assumes the form of a pear resting on its stem.

Each blowpipe produces about 10 carats per hour, and one operator can attend to ten or twelve blowpipes. Pear-shaped rubies weighing 80 carats can be obtained.

After the rubies have cooled they are split lengthwise, so that each furnishes two cut rubies. The loss in cutting amounts to three-quarters of the original weight, or three times the weight of the cut stones. The crude pear-shaped rubies are worth about 2½ cents per carat, the cut gems about 40 cents per carat.

The cutting, so called, and the polishing are performed by cementing the stone to a rod and pressing it on a revolving wheel of copper or bronze covered with abrasive powder of various degrees of fineness, the final polishing being done with tripoli and water.

Paquier's "scientific rubies" are physically, chemically, and optically identical with natural rubies. Both frequently contain microscopic air bubbles, which are called "frogs" by jewelers and "inclusions" by mineralogists, and which are spherical in the artificial rubies, but of various shapes in the natural gems. Moreover, the planes of crystallization characteristic of the natural ruby are not always discernible in the "scientific" ruby. But these slight differences are sometimes lacking. The eminent geologist Lacroix has expressed the opinion that it is impossible to decide with absolute certainty whether a ruby of fine color and free from inclusions is of natural or of artificial origin. On the other hand, Pinier, one of the leading gem experts of Paris, asserts that an artificial ruby can always be distinguished from a natural ruby.

Artificial sapphires are made by M. Louis Paris, by a process which was described in the SCIENTIFIC AMERICAN of December 17th, 1908, and which differs from the ruby process chiefly in the substitution of cobalt for chromium and the addition of lime in order to prevent the separation of the cobalt. These sapphires are not as perfect copies of nature as the rubies here described. Even in chemical composition, density, and hardness they are not quite identical with natural sapphires, and in physical and optical characters they differ unmistakably from the latter. In short, they consist of colored alumina, melted and solidified, but not crystallized, and their artificial origin can be detected very easily.

AN AUTOMOBILE TROLLEY-REPAIR TRUCK.

BY DR. ALFRED GRADENWITZ.

The ability of the automobile to travel quickly naturally led to its use by the fire departments of the more prominent cities of the world. Its success in this field has further led to its adoption by some street railway companies as a repair vehicle. Inasmuch as most of the street railways of the world are now operated by electricity, it was but natural that the electric automobile should have been selected. The cost of charging the batteries involves no great outlay on the part of the company with an elaborate power plant at its disposal, and the vehicles themselves are so simple in construction that they can be operated by any of the mechanically trained employees of a railway company.

The conditions which require immediate repair of a live wire are not unlike those which demand speed on the part of the fire automobile. Until the damage is repaired the cars are often stalled.

In the accompanying illustrations we present views of the electric trucks designed by the Siemens-Schuckert Company for street railway repair. In Fig. 1 an electrically propelled power car is illustrated which consists of a substantial frame which can be moved up and down by a crank. The frame is mounted on a base so stable that even when rounding curves there is no tendency to side swaying. On the frame a platform is mounted on a turntable of considerable radius. The lowermost level of the platform is eleven feet and the uppermost fifteen feet from the ground. The platform is reached by means of a ladder. Within the frame, spare parts and wrecking tools can be carried. The seating capacity is two men besides the driver.

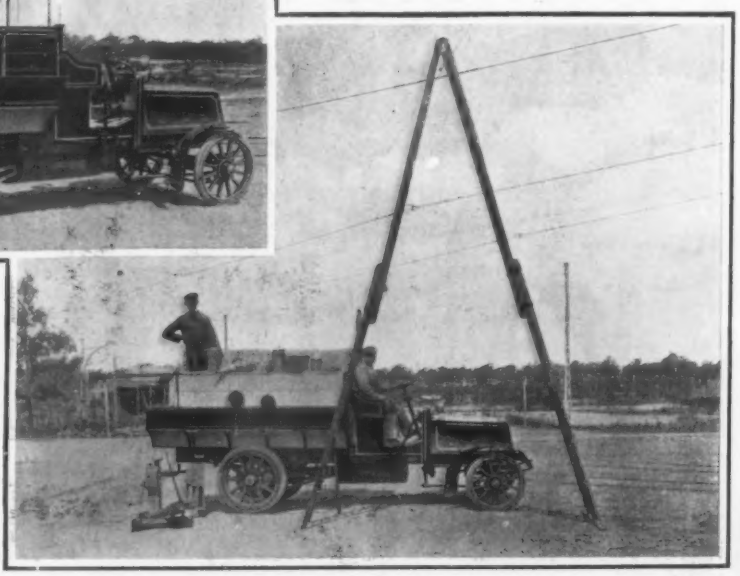

Fig. 3.—A special form of tower for repairing trolley wires.

AN AUTOMOBILE TROLLEY-REPAIR TRUCK.

The electrically propelled truck pictured in Figs. 2 and 3 differs from that just described. Instead of a tower, a large collapsible ladder is carried, which, when extended, rises sixteen feet above the ground. This ladder is readily set up and folded.

* The best reconstructed rubies were made by fusing minute rubies of inferior quality together with quartz crystal. The secret of the process was lost on the death of the inventor, a Swiss priest, who delivered the uncut rubies to a lapidary of Geneva. These rubies reached America in 1886. Some were very inferior, but others sold as high as $100 per carat and were and are as brilliant as the finest Burmese rubies. A few of them are still to be found in the possession of dealers and connoisseurs.

Handy Man's Workshop

HOW TO MAKE CONCRETE POTTERY.—I.

BY RALPH C. DAVISON.

Few people realize that anything of an artistic nature can be made from Portland cement. Most of us are used to looking upon this material as fit only for heavy construction work, such as foundations for buildings, bridge abutments, piers, etc. It is not remarkable, then, that the layman does not know that cement if used properly can be made to compare more than favorably with ornaments made from other and much more expensive materials; for even those who are in the trade, and working with it every day, know nothing of the wonderful and endless variety of artistic effects which can be produced with Portland cement.

The author for seven years has followed the Portland-cement concrete industry more or less closely, and for the past two years has devoted his entire attention to it. Some time ago he started experimenting with concrete pottery, and the experiments conducted along this line have developed some very interesting and practical results.

The method of making cement pottery is simple when understood; and if the craftsman follows the directions as will be given in this series of articles, he will find it easy to produce results which are fully worth while. Each step in the operation from the raw materials to the finished product will be explained in detail, including the incorporation of color effects, waterproofing, various surface effects, etc.

Portland - cement mortar has peculiar characteristics of its own. It is unlike clay. Therefore in modeling it has to be worked differently. In modeling clay one can form it into almost any shape, and it will remain there, for the reason that it is more or less sticky, and the various particles of which it is made up cling or adhere to one another, and thus hold the entire mass together. Portland-cement mortar, of which cement pottery is made, is composed of a mixture of sand or marble dust and pure Portland cement mixed together in various proportions. This mixture is wet down with water, and then by turning over and troweling, is made into a plastic mass called cement mortar. It is next to impossible to model in this material, for the reason that unless it is placed in a mold or a form is used to hold it in shape, while in its plastic state, it will fall down. The first step then in cement pottery work is to make the form.

There are several methods of making forms. One is to make wire frames on which to build up the cement mortar, and another is to make wooden or plaster molds. In the latter method the cement is handled in an entirely different manner from that used for the former. The use of wire forms is the simpler when there are but one or two of the same shape of articles to be made. When a quantity of one kind is to be made, it pays well to spend some time in making a wooden or plaster piece mold, as it can be used over and over again, whereas when wire forms are used a new form has to be made for each article, whether of the same shape or not.



Fig. 2.—BENDING SIDE PIECE INTO CIRCULAR FORM.

The best material for making wire forms is No. 20 Clinton wire lath having about a half-inch mesh. This can be procured at almost any hardware store. When buying it ask for galvanized wire lath, as this is better and easier to work with than the ungalvanized. If not familiar with this material, the accompanying illustrations will give a good idea of what is to be used. The only tool necessary is a good strong pair of tinners' shears for cutting the wire, or better still, a combination wire cutter and nippers, as this will answer for two purposes. In the accompanying half-tone illustration are shown two completed frames, one for a square and the other for a round piece of pottery. The latter



ROUND AND SQUARE FRAMES FOR A PIECE OF CONCRETE POTTERY.

form is composed of a round piece for the bottom and a long narrow piece for the sides. (See Fig. 1.)

To make a wire form 5 inches in diameter by 4 inches high.—First cut a piece of the wire lath large enough on which to lay out a 5-inch circle. Hammer it out until it is perfectly flat, and then place the point of the dividers in the intersection of the wires near the middle of the piece. Set the dividers to a 2½-inch radius, and scribe the circle. A piece of red or black chalk is best for this purpose, as it will make more distinct marks. Now take the wire cutters and cut the wire directly at the marks, and you will have the bottom of the frame complete.

The diameter of the bottom being 5 inches, the piece necessary for the sides of the frame will have to be three times this length, or 15 inches. Make it 17 inches long, thus allowing 1 inch for lap, and ½ inch of surplus wire on each end, as indicated at *a*—*a*. The height of the finished form is to be four inches. Cut the wire lath to 4½ inches, leaving a series of wire strands half an inch long at the bottom as indicated. Now take this piece which has been prepared for the sides and coax it into a circle by placing a straight edge (a piece of wood or metal having straight edges) successively along each of the meshes and pulling up on the free end of the wire lath as indicated in Fig. 2. After the piece is fairly well formed, lap the ends over, thus forming the circle, and secure them firmly to the main body of the sides by turning the free ends of the wire around the strands of the wire mesh, using the nippers to clinch them tightly. After having completed the side the bottom is placed in position, and the half-inch lengths of wire left at the bottom of the sides are used to wrap around the bottom and secure it in place. It is not essential to have this frame absolutely round or true, as it is used merely as a surface on which to build up the cement. The cement when once in place can be trued up by methods which will be explained in future articles. The square frame which is also illustrated is made in a similar manner. Care must be taken, however, to get the corner lines perpendicular to the base, for if this is not done it will cause trouble later on when truing up the sides.

In cutting the wire lath for the sides, do not forget to make it at least two inches longer than the sum total of the four sides. This will allow plenty for the lap and for the wire strands which are to be used for securing the ends in place. Of course, one need not confine himself to round and square forms, as innumerable sizes and shapes of frames can be made up, such as octagons, hexagons, etc., as well as forms for vases with gracefully curved outlines.

The next article in this series will treat of the method of applying the cement mortar and the forming of the finished pottery.

(To be continued.)

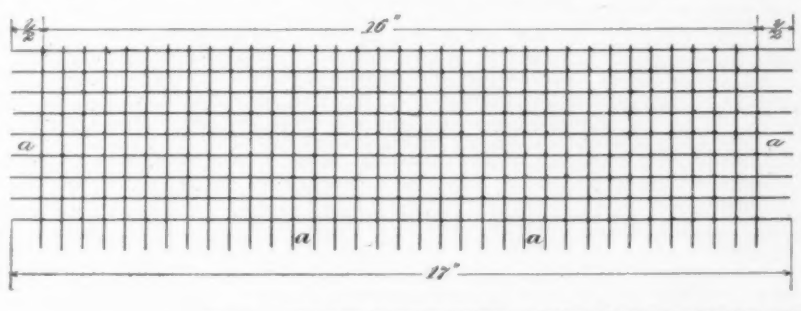

Fig. 1.—SIDE AND BOTTOM PIECE OF WIRE LATH FOR FRAME OF ROUND JAR.

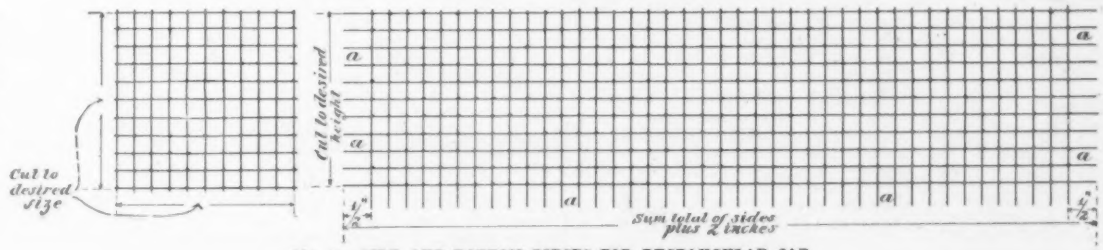

Fig. 3.—SIDE AND BOTTOM PIECES FOR RECTANGULAR JAR.

A SIMPLE MEDICAL COIL.

BY FREDERICK E. WARD.

Doubtless there are many persons who would like to make an induction coil for medical use, but are deterred from so doing by the belief that the work is too difficult for any one but a skilled mechanic to undertake. This is a great mistake, however, as it is quite possible for almost anybody to make a coil that will give good results at a cost of but a few cents, and with the use of only the most ordinary tools.

For the core there may be used an iron bolt about three inches long and three-eighths of an inch in diameter, as shown at *A* in the accompanying drawing. It is a good plan to soften the bolt by heating it red hot in a fire and allowing it to cool slowly. Make two thin wooden washers about an inch and a quarter in diameter, and glue them on the bolt to form a spool as shown at *B*, and cover the iron between the heads with a wrapping of two layers of paper glued on. The nut shown is not necessary, but makes a neat finish.

The first part of the winding, or primary coil, requires about half an ounce of No. 20 or No. 22 double cotton-covered magnet wire. Pass the end of the wire through a small hole in one of the heads, and wind on a smooth layer of the wire like thread on a spool. When the opposite head is reached wind a second layer of wire over the first one back to the place of beginning. Cut off the wire and pass the end through a second hole in the head near the first one, as shown at *D*. The excess of wire will be useful for connections.



The next part of the winding, or secondary coil, requires an ounce or two of No. 32 single cotton-covered magnet wire. Finer wire gives more powerful results because of the greater number of turns for a given weight, but it is rather delicate to handle. Before winding on any of this wire, glue on a wrapping of two or three layers of paper over the primary coil, to keep the two coils entirely separate. The secondary wire need not be wound in layers, though care is required to avoid injuring the insulation or breaking the wire by pulling it too tight. The two ends may be left projecting, as shown at *H*, for connection to two handles or electrodes, and the coil may be protected by a final wrapping of paper, as shown at *C*.

One pole of a dry battery *E* is connected to the tang of a large file *F*, and the other to one of the primary terminals *D*. The remaining primary terminal *G* is then lightly dragged along the surface of the file, thus making and breaking the circuit in rapid succession as the wire passes over the teeth. If the shocks received from the handles are too strong, use a longer piece of wire at *G*; if too weak, add another dry battery in series, or put more wire on the secondary.



A SIMPLE MEDICAL COIL.

RECENTLY PATENTED INVENTIONS.

Pertaining to Apparel.

GARMENT-RACK.—FANNIE WOOD, New York, N. Y. More particularly the invention relates to means for supporting a plurality of garment hangers in spaced relationship. The rack is also adapted for use in supporting skirts, the skirts and garments on the hangers being rotated about the central standard of the hanger. Features of the present patent are modified forms of a prior application filed by F. Wood.

SHOE.—J. E. SHAWHAN, Nevada, Mo. The improvement is in shoes and particularly in the fastening devices of the shoe. The construction will avoid the necessity of lacing the shoe down entirely to the base of the front opening, and provides for preventing the gaping of the opening below the laces by means secured in the shoes and held from twisting or other displacement.

Electrical Devices.

ALARM SYSTEM.—L. GIESE, Fort Worth, Texas. The invention refers more particularly to a circuit breaker adapted to operate upon a predetermined increase in temperature or upon being mechanically bent or broken. The minimum quantity of fusible material need be employed, and so supported that upon being broken or fused, it becomes entirely displaced and the circuit broken.

Of Interest to Farmers.

STOCK-WATERING DEVICE.—G. E. ODELL, Bowen, Ill. The object of the inventor is to provide a device more particularly of the class with means for automatically controlling the supply of water thereto, and having an arrangement of means for intercepting trash and filth, whereby clogging or interference with the water supply is avoided and cleansing of the device is facilitated.

BROADCAST ATTACHMENT FOR PLANTERS AND FERTILIZER DISTRIBUTERS.—B. F. CRANWELL, Henderson; C. F. F. ALLAN and J. H. TRUDGEON, Auckland, New Zealand. The invention provides an attachment to planters, seed drills, fertilizer distributers, and like machines. It will act to automatically spread seed or fertilizing material as it passes through its tubular body from a source of supply, and which will further spread and scatter material at its discharge end and distribute it in a broadcast manner and so that the discharged material will be largely protected from the action of the wind.

COMBINATION-PLANTER. — C. LINDER, Converse, S. C. An object of the invention is to provide a plow beam for use with the planter held in such a manner that the machine is self guiding. Further, to provide a novel form of hopper for the grain and for the fertilizer and means for feeding the fertilizer and the grain simultaneously.

Of General Interest.

PRINTER'S HOOK.—F. C. LEETHEM, Middletown, N. Y. The object in this case is to produce an adjustable printing hook which can be adjusted by an ordinary pin wrench, or by other interchangeable means. From this arrangement a printer purchasing the hooks may select the particular means desired for adjusting the hooks, but if at any time he desires to adjust the hooks in a different manner, or by different means, this may be done.

METHOD OF COATING LEATHER WITH FABRIC.—F. J. GLEASON, Walpole, Mass. Generally speaking this invention relates to the manufacture of articles in which a cement containing rubber or rubber compounds is employed to secure fabric to leather. The object is to provide a process by means of which such cement may be rendered highly adhesive after it has once become dry and substantially non-adhesive, and a cement-coated fabric may be caused to adhere firmly to a surface of leather.

SIGHT.—J. T. PEDDIE, Caxton House, Westminster, London, England. This sight is for use upon firearms, and more particularly when it is desirable to attai.. a fine vertical adjustment of the cross bar by aid of a screw. Generally speaking, in this type of sight, a long screw is employed, and ordinarily it is impossible because of the slow movement of this screw and all parts actuated thereby, to obtain a coarse and rapid adjustment of the cross bar as, for instance, by sliding it quickly by a direct movement of the hand.

Heating and Lighting.

SMOKE-CONSUMING FURNACE. — P. J. FLANAGAN, New Orleans, La. The inventor provides a furnace which is simple and durable in construction, and arranged to insure a complete burning of the smoke and gas arising from the burning fuel in the firebox, utilizing the burning fuel to the fullest advantage for heating purposes and providing a complete consumption of the fuel.

MINER'S CANDLESTICK.—C. J. RAMSTEAD and P. J. JOHNSON, Ouray, Colo. More particularly the invention relates to candlesticks such as are adapted for use in mines or similar places, and each of which in general consists of an elongated body member adapted to have one end driven into the wall of a mine, a folding hanger pivotally secured on the body member and a bracket for holding a candle in place.

LENS FOR BUILDING-LIGHTS. — P. SCHWICKART, New York, N. Y. In the present patent the invention has reference to building-lights used in walls, skylights, floors and other parts of buildings, and its object is to provide a new and improved lens for building lights, arranged to insure a proper and uniform distribution of the rays of light over a large area.

Household Utilities.

POST-HINGE.—W. S. EMERY, New York, N. Y. The object of the inventor is the provision of certain new and useful improvements in post hinges for water-closet seats, covers and like articles, whereby the spring pressure is graduated and a stop is provided for limiting the upward swinging motion of the seat, cover, or like article.

WATER-CLOSET SEAT.—W. S. EMERY, New York, N. Y. In this instance the object of the invention is to provide a new and improved water closet seat, built up from a number of pieces of wood, formed and joined in such a manner that the greatest amount of strength is had at the sides, that is, at the points most needed.

Machines and Mechanical Devices.

MOUNTING FOR GANG-SAWS.—A. JONES, Qolitic, Ind. The invention has reference to mountings for gang saws, the more particular object being to produce certain improvements in hanger arms for supporting the saw and in parts associated with this hanger arm, in order to improve the general efficiency and safety of the gang saw while in action.

MECHANICAL SCRAPER.—F. R. ABEEL, Tacoma, Wash. This invention pertains to dirt scrapers. A shovel is operated by a cable which passes through an anchored pulley and causes the scraper to travel up an inclined plane leading to a hopper where the load is dumped. The shovel is provided with a novel arrangement of gates and controlling device for ready loading and unloading.

Railways and Their Accessories.

CAR-SEAL.—J. W. BOWERS, Seymour, Ind. The improvement refers to metallic seals for preventing the unwarranted opening of freight car doors without exposure, and has for its object to provide novel details of construction for a car door seal which afford a conveniently applied seal that cannot be detached unless broken.

CAR-DOOR LOCK.—C. H. LEWIS, Chillicothe, Ohio. By means of this device a car door may be securely fastened when either open or closed, or at any intermediate position. It is adapted for employment upon the doors of box cars which are employed in carrying perishable goods, it being desirable in such cases to permit the door to stand open slightly for the purpose of ventilation.

PASSENGER CONTROL.—E. LINHARDT, New York, N. Y. The object in this instance is to provide a control for conveniently and quickly handling passengers in the stations of underground and elevated railways with a view to facilitate the loading and unloading of the cars without discomfort to the passengers entering or leaving the cars.

Pertaining to Recreation.

AMUSEMENT DEVICE.—A. P. LAUSTER, Paterson, N. J. More specifically this device is of the type which employs a car moving along a guide or track, and the object of the inventor is to provide a construction which will operate to give the cars a peculiar movement so that the occupants will have a novel experience.

MECHANICAL TOY.—C. W. CLARK, New York, N. Y. In the present patent the object of the improvement is to provide means for giving one portion of the animal, for instance, the head, one movement, and giving a portion of the head, for instance, the ears, a separate movement independent of the movement of the head.

Pertaining to Vehicles.

WHEEL.—J. S. STRAWN and R. W. DAVIES, Avonmore, Pa. The invention comprises a wheel hub having the inner end counterbored and the outer formed with a lubricating chamber having a hole for the introduction of the lubricant, an annular lubricating chamber near the inner end of the hub contiguous to the bore and connected with the first named chamber by a passage contiguous to said bore, and a hardened bushing wholly arranged in the bore of the hub between the annular chamber and counterbore, the hub being formed as a single piece.

WHIFFLETREE-HOOK.—T. MORCOM, Norwood, Ohio. This invention relates to whiffletree hooks, and more particularly such as are provided with resilient retaining means for securing the end of a trace in position on a whiffletree, swinging-tree or the like. It constitutes an improvement on the device shown and described in the U. S. Patent formerly granted to Mr. Morcom.

NOTE.—Copies of any of these patents will be furnished by Munn & Co, for ten cents each. Please state the name of the patentee, title of the invention, and date of this paper.

Notes and Queries.

Kindly write queries on separate sheets when writing about other matters, such as patents, subscriptions, books, etc. This will facilitate answering your questions. Be sure and give full name and address on every sheet.

Full hints to correspondents were printed at the head of this column in the issue of March 13th or will be sent by mail on request.

(12093) C. D. C. says: In a recent issue you answered an inquiry in regard to the peculiar rusting of galvanized fence wire. Permit me to add, from an experience of ten years with barb-wire, ribbon-wire, and chicken-wire netting, that ribbon wire outlasts barbed wire twice over, ordinary 18-gage chicken-wire netting lasts in the vicinity of New York city not over three years, and always rusts out completely along the upper one-third or one-half of its width, while the remaining portion of its width will still be perfect. The same condition may be observed to a degree with barb or ribbon wire strung parallel in a fence. The bottom wire remains in good condition, while the others are more and more corroded from the bottom upward. The persistency of these peculiar conditions would indicate that it is not due to local or chance conditions. Remembering that all masses of metal show opposite polarity at top and bottom, it would be logical to attribute this peculiarity of rusting largely to galvanic influence. Now in turn I would ask whether it is a common and recognized fact that a tin roof coated in the best manner with graphite paint is sure to corrode in rather minute points and form holes as though fine shot had been fired through it, the body of the sheets remaining uncorroded? Having had sufficient (dear) experience to be sure of my ground, I do not hesitate to assert that graphite paint is solely responsible for such condition. My explanation (which correlates this inquiry with the previous question) would point also to galvanic action as the fundamental cause, probably due to incompatible polarities of graphite and steel. A. We thank you for the particulars of your interesting experience, which seems to confirm the substance of our reply to the question to which you refer.

(12094) O. H. T. writes: I have just noted in your issue of the 15th of May your answer to the "coiled watch spring" question, in query No. 12083. I have speculated a good deal on the problem, and wish to give what I think is the explanation, though experimental proof would probably be difficult. In winding up the spring work would disappear and, I believe, an equivalent amount of heat would be produced, which would be dissipated; then when the spring was allowed to unwind, the reverse would take place. Thus, if the wound-up spring were destroyed, its energy would nevertheless not be lost. In the same way, if compressed air were crowded into other substances, and so rendered incapable of giving back the energy expended in compression, that energy is still in existence. Many other problems along the same lines as these, but much more difficult of solution, present themselves on a little thought. A. Your comments upon the dissolving a coiled spring in acid are quite correct. It would be foolish to maintain that the potential energy of the coiled spring would produce more heat of solution than the same weight of steel in any other mechanical condition. As well maintain that the spring would produce more heat if dissolved on a hilltop than in the valley below because its potential energy is greater on the hilltop. Potential energy is not thus convertible. As you say, there are many other problems which involve the same thing.

(12095) W. B. B. asks: To give information that will immensely benefit the public at large, I will be pleased to have you give me, as soon as you can look into the matter thoroughly, the best means and best way to lay sewer pipe, and especially the making of cement joints. We have sanitary sewers here, and they are filled with roots that creep into the crevices and joints of the pipe. The pipes laid in this vicinity are placed in position, a little cement placed on the lower half of the bell or socket end of the pipe, and then the next pipe with a string of oakum on it is inserted into the pipe; the balance of the joint is mortared up with cement. The principal information I am seeking is whether the hemp or oakum string is necessary or of any value, or whether a good Portland cement joint is or is not the better way to make the joint. A. Provided the sewer pipe is laid upon a perfectly solid bed, so that the joints are unlikely to be distorted at all (by the filling in of material above the sewer, subsequent traffic over it, or otherwise) we should say that as far as the prevention of the entrance of roots into the joints is concerned, the oakum might better be omitted and a joint of neat Portland cement substituted. It is of course essential that any flow of water through the sewer should be prevented until the cement has had time to set, otherwise a very small quantity trickling through the joints will wash out a small part of the cement and leave interstices in it. The object of oakum or similar fibrous packing is to provide a small amount of "give" or "spring," so that any slight distortion or settlement of the pipe will be compensated by expansion of the packing, and will not leave openings or break the pipe or flanges; but such roots as you describe are quite capable of growing through the oakum, even when the latter apparently tightly fills the joints.

NEW BOOKS, ETC.

HÜTTE. Des Ingenieurs Taschenbuch. III. Berlin: Verlag von Wilhelm Ernst & Sohn. 20te Auflage. 12mo.; pp. 830.

We have already had occasion to review the first two volumes of this excellent standard work of engineering reference. This, the third volume, has occupied not a little time in its preparation, largely because entirely new subject matter has been introduced. Among the new subjects may be mentioned "Reinforced Concrete," "Rack and Pinion Roads." "Dam Construction" and "Factory Plants." The subject matter of the volume is divided into Mensuration, Structural Iron Work, Heating and Ventilation, Road Engineering, Water Supply, City Draining, Statistics of Building, Reinforced Concrete, Bridge Building, Railway Construction, Rope Tramways, Rack and Pinion Roads, Water Works, Gas Engineering, Factory Plants. The work contains not only the information which is to be found in such American reference books as Trautwine and Haswell, but much mathematical discussion which will simplify engineering calculation.

AN OCTAVAL INSTEAD OF A DECIMAL SYSTEM. An Essay to Show the Advantages of Eight-Figure, and the Disadvantages of a Ten-Figure Notation for Money, Weights, and Measures. By S. S. Buckman, F.G.S., Honorary Member of the Yorkshire Philosophical Society; of the Cheltenham Natural Science Society; late Hon. Secretary of the Cotteswold Naturalists' Field Club. Oxford: Parker & Son, 27 Broad Street. London: Simpkin, Marshall, Hamilton, Kent & Co., Ltd.

ARTIFICIAL WATERWAYS AND COMMERCIAL DEVELOPMENT. By A. Barton Hepburn. 12mo.; pp. 115. Price, $1 net.

This book may be considered a concise statement of the functions of canals in their relation to the economics of this country. After discussing the world's canals in general, the author passes to a fairly detailed account of the canal system of New York, and shows how the failure of New York State to develop and maintain her canal system found yearly expression in loss of commerce to the city of New York. The Panama Canal is rather briefly dismissed in nine pages—an allotment of space which it seems to us is somewhat inadequate for so important a subject. A good chapter is that on "The Waterways Question and Conservation of Our Resources."

OUR INSECT FRIENDS AND ENEMIES. By John B. Smith, Sc.D. Philadelphia: J. B. Lippincott Company, 1908. 12mo.; 314 pp. Price, $1.50 net.

This book deals with the relation of insects to man, to one another, and to plants, and it has a chapter on the war against insects. The author is Professor of Entomology in Rutgers College, and is a member of many learned societies. The book is well illustrated, and there is a welcome absence of the time-honored cuts which we are wont to expect in books on entomology. The book is one which will prove of value to the general reader as well as to the specialist.

INDEX OF INVENTIONS

For which Letters Patent of the United States were Issued for the Week Ending

June 1, 1909,

AND EACH BEARING THAT DATE

[See note at end of list about copies of these patents.]

Advertising apparatus, L. U. Cornelius	923,335
Air cooling apparatus, W. A. Merralls	923,437
Air purifier, H. A. Robinson	923,444
Alcohol, making, Woolner & Lassloffy	923,232
Alloy, silicon, J. T. H. Dempster	923,152
Amusement apparatus, Connelly & Rudolph	923,334
Amusement apparatus, F. S. Chance	923,489
Animal dipping apparatus, J. A. Willits	923,473
Antidrifting device, E. Gunnell	923,648
Antiskidding device, Clergy & Morrow	923,332
Antislip device, W. M. Stevenson	923,456
Armature construction, B. A. Behrend	923,614
Asphalt heater, Driscoll & Thompson	923,421
Automatic load discharging elevator, O. A. Green	923,355
Automobile motor, M. & W. Eastman	923,632
Automobiles, continuous track light attachment for, J. M. Pitney, Jr.	923,295
Automobiles, power transmitting mechanism for, L. P. Mooers, reissue	12,966
Axle skein, U. H. Brown	923,135
Bait or lure, fish, E. J. Lockhart	923,670
Balance or scale, prescription, W. W. Dryden	923,781
Balancing machine, N. C. Bassett	923,401, 923,402
Bale and package tie, W. P. Watkins	923,222
Barrel, J. W. Strehli	923,461
Bearing for the shafts of delicate instruments, J. Johnson	923,184
Bearing, roller, E. L. Sharpneck	923,716
Bed and divan, combination folding, W. E. Ingraham	923,529
Bed, couch, G. F. Sisbower	923,305
Bed elevator and rest, hospital, J. M. Hopkins	923,525
Bed, invalid, A. C. Taylor	923,729
Bed joint, metal, O. Adams	923,235
Bed moving machine, W. H. Fulton	923,424
Bed springs, safety releasing clamp for baled, Bernstein & Bailey	923,758
Beds, fracture apparatus for use with invalid, C. S. S. Barrows	923,317
Belt fastener, R. Maxwell	923,546
Belt, power transmission, L. Onderdonk	923,663

Legal Notices

60 YEARS' EXPERIENCE

PATENTS

TRADE MARKS
DESIGNS
COPYRIGHTS &C.

Anyone sending a sketch and description may quickly ascertain our opinion free whether an invention is probably patentable. Communications strictly confidential. HANDBOOK on Patents sent free. Oldest agency for securing patents.

Patents taken through Munn & Co. receive *special notice*, without charge, in the

Scientific American.

A handsomely illustrated weekly. Largest circulation of any scientific journal. Terms, $3 a year; four months, $1. Sold by all newsdealers.

MUNN & Co. 361 Broadway, **New York**
Branch Office, 625 F St., Washington, D. C.

Bench clamp or vise, E. P. Bridges 923,323
Billiard table, convertible pocket carom, H. F. Davenport 923,249
Blackboard tray attachment, J. W. Hainline 923,262
Block press, E. Sprenger 923,595
Block signal system, automatic electric, H. W. Price 923,296
Block signal system, electric railway, M. E. Launbranch 923,706
Block signal systems, automatic train controlling and signaling mechanism for, H. W. Price 923,297
Blood draining tube, Doldge & Holzhausen 923,416
Blower, steam jet, C. T. Coe 923,490
Boiler. See Water tube boiler.
Bond compressor, W. H. Finley 923,504
Box attachment, H. W. Stuver 923,381
Box lid support, E. Oswald 923,694
Brake beam, H. Ziemss, Jr 923,475
Brake shoe, B. Peducasse 923,572
Brick drying apparatus, W. F. Decker 923,340
Bridle blind, F. T. Moore 923,289
Bridle crown piece, J. T. Hegland 923,517
Broiler, L. Fey 923,348
Buckle, cross line, G. R. Blair 923,316
Building construction, J. Gibson 923,507
Burglar alarm, E. Schwab 923,712
Bushing, E. Kaufmann 923,273
Butt hook, E. W. Smith 923,722
Butter cutter, Macnish & Penn 923,544
Cable, elastic wire, T. W. Colleran 923,626
Cable stripping machine, J. W. Glariel 923,426
Camera, A. M. Henry 923,173
Can body and blank therefor, F. Wegner 923,741
Can body making machine, F. Wegner 923,740
Can opener, A. F. Fitz Gerald 923,349
Car and engine replacer, J. Flynn 923,785
Car body construction, L. G. Nilson 923,292
Car brace, W. I. Taylor 923,463
Car brake, mine, L. Glen 923,260
Car derailing device, W. M. Mitchell 923,683
Car draft and buffing gear, I. O. Wright 923,398
Car, dump, S. Otis 923,695
Car fender, P. Susseles 923,213
Car heating system, T. Parker 923,570
Car seat, M. M. Murchison 923,198
Car seat operating device, M. M. Murchison 923,197
Car station or street indicator, C. M. Dickinson 923,341
Car ventilator, G. C. Breidert 923,241
Cars, current collector for electric, G. Mertens 923,194
Carburetor, G. F. Schmidt 923,377
Carpet fastener, roll, White & Chickering 923,468
Cash register, A. H. Heltberg 923,172
Cattle guard, D. Thomson 923,383
Cattle guard, J. H. Hammill 923,512
Cement ingredient, W. V. B. Ames 923,238
Chafing dishes, etc., collapsible stand for, L. K. Sone 923,208
Chain link welding machine, L. Roehr 923,582
Chains, apparatus for molding solid link, W. C. Herron 923,521
Chair and stool, L. E. Hubert 923,267
Chandelier, gas, G. E. Kaschub 923,433
Checkrein holder, R. E. King 923,276
Christmas tree holder, C. E. Singleton 923,206
Chuck, spiral, G. B. Taylor 923,730
Churn, A. Griggs 923,444
Churn, vibratory, W. Sanders 923,375
Cigar pressing apparatus, K. Wimmer et al. 923,231
Circuit closer for recording anemometers, J. C. Jurgensen 923,185
Cistern and well pump casing, J. S. Shea 923,302
Clamp, C. B. Wanamaker 923,610
Clamp, Calvin & Kaufman 923,329
Cleaning apparatus, Mayo & Houlehan 923,547
Clevis, W. S. Smith 923,306
Clip, C. M. Mocabee 923,558
Cloth bolt holder, E. T. Flemister 923,255
Cloth piler, A. Ratner 923,577
Clothes pounder, J. Q. Deal 923,414
Clutch, L. Atwood 923,613
Clutch and brake mechanism, Ellett & Forsyth 923,254
Clutch mechanism, A. F. Jackson 923,180
Coat hanger, I. Gerard 923,786
Coke drawer, H. Cory 923,410
Coke drawing apparatus, C. M. Clarke 923,139, 923,140
Collar fastener, horse, T. W. Hardy 923,515
Comb, A. M. Young 923,399
Combustion engine, H. H. Cutler 923,496
Composing machines, assembling mechanism of typographical, Billington & Hollwell 923,131
Composition of matter, C. A. Goldsmith 923,641
Computing machine, O. D. Johantgen 923,289
Concrete, hanger socket for reinforced, F. N. Kneas 923,188
Condenser, W. A. Moffatt 923,684
Condiment holder, H. W. Watson 923,390
Contact plow support, S. T. Bole 923,484
Conveying apparatus, J. T. Cowley 923,337
Conveying apparatus, J. M. Hore 923,356
Cooker, M. M. Newsam 923,690
Cooking and canning tank, H. L. Cunningham 923,339
Cooking utensil, E. C. Rose 923,445
Cord holder, Planette & Jorgenson 923,575
Corn heading machine, Kaffir, J. Norris, Jr. 923,691
Corner bead, M. A. Hannon 923,430
Corset, J. Lindauer 923,361
Cotton compress, C. J. Luce 923,190
Cotton picker, L. M. Hamilton 923,649
Cotton picker, hand, H. E. Fourcher 923,638
Cotton gin, F. T. Kent 923,533
Coupling. See Pipe coupling.
Crane, C. G. Sprado 923,593
Crane, electric traveling, E. E. Brosius 923,133
Crate or box, knockdown, J. F. Myser 923,367
Crate, poultry, D. Turner 923,736
Crutch, S. T. Glasford 923,352
Cuff holder, C. Walker 923,738
Cultivator, W. D. Gaston 923,163
Cultivator, Lodwig & Naumann 923,541
Current motor, alternating, E. F. W. Alexanderson 923,753, 923,754
Current motors, protective device for commutator type alternating, B. G. Lamme 923,666
Curtain fastener, H. Higgin 923,523
Curtain fixture, F. H. Bassett 923,239
Curtain fixture, H. E. Keeler 923,794
Curtain hanging fixture, adjustable, R. C. Davie 923,630
Cuspidor, F. W. Kendell 923,661
Cuspidor, Kendall & Owen 923,660
Damper regulator, automatic, G. Furuholmen 923,259
Density determining apparatus, W. D. Mount 923,560

Wood-working Machinery



For ripping, cross-cutting, mitering, grooving, boring, scroll-sawing edge moulding, mortising; for working wood in any manner. Send for catalogue A.
The Seneca Falls M'f'g Co
695 Water St., Seneca Falls, N. Y.

Engine and Foot Lathes
MACHINE SHOP OUTFITS, TOOLS AND SUPPLIES. BEST MATERIALS. BEST WORKMANSHIP. CATALOGUE FREE
SEBASTIAN LATHE CO., 120 Culvert St., Cincinnati, O.

Foot and Power and Turret Lathes, Planers, Shapers, and Drill Presses.
SHEPARD LATHE CO., 113 W. 2d St. Cincinnati, O.

Best grade cedar canoe for $20
Best grade of Cedar Canoe for $20. We sell direct, saving you $20 on a canoe. All canoes cedar and copper fastened
We make all sizes and styles, also power canoes. Write for free catalog giving prices with retailer's profit cut out. We are the largest manufacturers of canoes in the world.
DETROIT BOAT CO., 126 Bellevue Ave., Detroit, Mich.

How to Construct An Independent Interrupter

In SCIENTIFIC AMERICAN SUPPLEMENT, **1615**, A. Frederick Collins describes fully and clearly with the help of good drawings how an independent multiple interrupter may be constructed for a large induction coil.

This article should be read in connection with Mr. Collins' article in SCIENTIFIC AMERICAN SUPPLEMENT, **1605**, **"How to Construct a 100-Mile Wireless Telegraph Outfit."**

Each Supplement costs 10 cents; 20 cents for the two. Order from your newsdealer or from

MUNN & CO., 361 Broadway, New York

THIS GRINDER

Has no pumps, no valves. No piping required to supply it with water. Always ready for use. Simplest in construction, most efficient in operation. *Price will interest you*

W. F. & JNO. BARNES CO.,
Established 1872.
1999 Ruby St., Rockford, Ill.

THE INTERNAL WORK OF THE Wind. By S. P. LANGLEY. A painstaking discussion by the leading authority on Aerodynamics, of a subject of value to all interested in airships. SCIENTIFIC AMERICAN SUPPLEMENTS **946** and **947**. Price 10 cents each, by mail. Munn & Company, 361 Broadway New York City, and all newsdealers.

Pipe Cutting and Threading Machine
For Either Hand or Power



This machine is the regular hand machine supplied with a power base, pinion, countershaft, etc., and can be worked as an ordinary power machine or taken from its base for use as a hand machine. Pipe ⅛ in. to 15 in. diameter handled easily in small room. Illustrated catalogue—price list free on application.
THE CURTIS & CURTIS CO.
6 Garden St., Bridgeport, Conn.

Two Good Books for Steel Workers

Hardening, Tempering, Annealing and Forging of Steel

By JOSEPH V. WOODWORTH

Size 6¼ x 9¼ inches. 288 pages. 201 illustrations. Price $2.50 postpaid

THIS is a practical work, treating clearly and concisely modern processes for the heating, annealing, forging, welding, hardening and tempering of steel, making it a book of great value to toolmakers and metal-working mechanics in general. Special directions are given for the successful hardening and tempering of steel tools of all descriptions, including milling cutters, taps, thread dies, reamers, hollow mills, punches and dies and various metal-working tools, shear blades, saws, fine cutlery and other implements of steel, both large and small. The uses to which the leading brands of steel may be adapted are discussed, and their treatment for working under different conditions explained; also special methods for the hardening and tempering of special brands. A chapter on case-hardening is also included.

The American Steel Worker

By E. R. MARKHAM

Size 5¼ x 8 inches. 367 pages. 163 illustrations. Price $2.50 postpaid

THIS is a standard work on selecting, annealing, hardening and tempering all grades of steel, by an acknowledged authority. The author has had twenty-five years' practical experience in steel-working, during which time he has collected much of the material for this book. Careful instructions are given for every detail of every tool. Among the subjects treated are, the selection of steel to meet various requirements; how to tell steel when you see it; reasons for different steels; how to treat steel in the making of small tools, taps, reamers, drills, milling cutters; hardening and tempering dies; pack-hardening; case-hardening; annealing; heating apparatus; mixtures and baths, the best kind, and why; and in fact everything that a steel-worker would want to know is contained in this book.

OUR SPECIAL OFFER: The price of these books is **$2.50** each, but when the two volumes are ordered from us at one time, we send them prepaid to any address in the world on receipt of **$4.00.**

MUNN & COMPANY, Publishers
361 Broadway, New York

Depositing machine, E. Herisse 923,175
Developing tank, J. G. Lavender 923,669
Diffusion apparatus, W. Bock 923,760
Dilator, J. W. Shuits 923,303
Dipper and server, C. C. Williams 923,229
Dish washing machine, H. D. Thomas 923,215
Display rack for garments and the like, H. E. Reyher 923,705
Display stand, J. Guilong 923,647
Ditching machine, F. Clayman 923,141
Door hanger, I. Johnson 923,272
Door hanger and hood, sliding, Richey & Crites 923,706
Doughnut drainer, G. H. Trepanier 923,465
Draft attachment for vehicle gears, G. Streich 923,727
Draft equalizer, V. H. Boring 923,619
Draft rigging, friction, C. A. Tower 923,735
Drain pan, A. Johnson 923,270
Drawer attachment, desk, Walker & Wilson 923,739
Drill, M. Hardsocg 923,513, 923,514
Drive mechanism, variable, S. B. Gray 923,787
Dyeing apparatus, R. Diederichs 923,342
Dynamo brushes, production of carbon covered metal sheets for, J. F. P. Ringsdorff 923,581
Electric cut-out, T. E. Murray 923,439
Electric machine, dynamo, Behrend & Mattman 923,615
Electric machine, dynamo, C. E. Lord 923,673
Electric motor, E. F. W. Alexanderson 923,311
Electrical connection rosette, J. L. Burton 923,327
Electrical connections, protective conduit holder for, J. F. McElroy 923,686
Electrical controller, Steen & Logan 923,597
Electrical machines, winding for, B. G. Lamme 923,667
Electrolytic arresters, ground leg connection for, E. E. F. Creighton 923,338
Electrolytic cell or condenser, E. E. F. Creighton 923,774
Elevator automatic control device, L. J. Milke 923,306
Elevator bin slide controlling device, F. R. McQueen 923,291
Elevator safety appliance, H. Pieron & W. Merkel 923,574
Engine, E. Franklin 923,505
Engine, W. J. O'Keeffe 923,569
Engines, jump-spark plug for explosion, W. W. King 923,535
Envelop, B. Joachim 923,182
Envelop closing cords, machine for attaching merchandise, W. E. Swift 923,602
Envelop, document filing, O. G. Law 923,539
Envelop machine, W. S. Metcalfe 923,679
Envelop machine, W. D. Slater 923,720
Excavating buckets or shovels, tooth for, Exton & Sherrerd 923,159
Excavating machine, E. J. Mundale 923,290
Excavating shovel, H. G. Butler 923,405
Excavator, E. Hoy 923,528
Expansion motor, G. Meyersberg 923,680
Explosive, E. A. Le Sueur 923,435
Explosive engine, R. W. Coffee 923,491
Extension table, A. H. Stone 923,309
Extractor. See Ore extractor.
Eyeglasses, J. Friedlander 923,506
Fabric roll edge protector, G. W. Loughman 923,362
Fare register and recorder, W. I. Ohmer 923,692
Feed mixing machine, C. Dabney 923,248
Fence machine, wire, J. F. Claudin 923,770
Fence making machine, wire, J. M. Denning 923,778
Fence wire releasing device, F. Cummings 923,494
Fender, J. E. Horner 923,654
Fibrous material with liquids, apparatus for treating, Thies & Mathesius 923,310
Filing system, vertical, J. Dannheiser 923,412
Filter, oil, H. A. Winton 923,747
Fire escape, E. Miller 923,555
Fire extinguishers, exchangeable container for chemical, H. Mikorey 923,551
Fire lighter, H. O. Baddley 923,315
Firearm, H. Poettich 923,701
Firearm hammer indicator, F. C. Chadwick 923,244
Fireplace, portable, P. Bernstein 923,318
Fireproof floor (concrete beam), J. H. Magdel 923,383
Fishing gig, L. C. Perry 923,573
Fishing line reels, attaching device for, E. W. Kurtz, Sr 923,664
Floor scraper, C. W. Johnson 923,271
Floor smoothing machine, Child & Kraemer 923,330
Flower pots and the like, attachment for, M. C. A. C. Kroeger 923,663
Fluid pressure engine, J. C. Fleming 923,100
Fluid pressure heat engine, Whiteway & Hubbard 923,226
Fly paper holder, R. E. Fee 923,502
Fly-trap, vacuum, I. A. Myser 923,368
Folding box, F. E. Sterrett 923,725
Folding table, M. A. Drees 923,500
Fork, G. J. Russler 923,709
Frames and the like, corner connection for, C. Sewarting 923,713
Furnace, D. C. Artman 923,478
Furnace, M. J. & H. B. Farquhar 923,784
Furnace and heater, J. A. Penney 923,697
Furnace front, J. Howden 923,178
Furnace regulator, automatic, M. J. & H. B. Farquhar 923,783
Furnace slag, machinery for conveying blast, E. A. Uehling 923,218
Furniture, article of, F. X. Faller 923,344
Furring, metallic, A. Fontaine 923,423
Fuse and switch box, combined, W. R. Vanaman 923,466
Fuse plug, G. W. Goodridge 923,642
Gapped wheel, F. Wagner 923,467
Garment clasp, L. C. Stukenborg 923,690
Gas appliance, safety, F. J. Grott 923,646
Gas engine, C. G. Sprado 923,591
Gas holding and administering apparatus, G. von Ach 923,594
Gas jet regulator, C. J. Johnson 923,752
Gas mixing and administering apparatus, G. von Ach 923,531
Gate, J. M. Seay 923,751
Gear for motors, change-speed, P. Evans 923,715
Gear, variable speed, J. Sturgess 923,636
Gearing, variable speed, P. C. Williamson 923,212
Gearing, W. Sweet 923,472
Gearing, O. Schaerer 923,382
Glass articles, machine for making hollow, Graves & Whittemore 923,711
Glove, E. E. Sabin 923,261
Glove, gauntlet, J. H. Fletcher 923,374
Grain cleaner and drier, A. Dill 923,256
Grain drier, L. L. Cass 923,498
Graphite, making, E. G. Acheson, reissue 923,137
Grapple, W. A. Rogers 12,964
Grinding machine, C. G. Trefthen 923,299
Hair dye, E. Erdmann 923,464
Halter, combination rope and strap, C. N. McClintock 923,635
Harmonica attachment, W. F. Newsam 923,380
Harness appliance, D. S. Lepley 923,434
Harvester, corn, C. A. Bullard 923,326
Harvester, cotton, J. M. Droke 923,343
Hay rake, revolving, E. V. Swern 923,728
Head rest support, W. A. Wilkins 923,746
Headlight dimmer, R. W. Clark 923,760
Heel breasting mechanism, Evans & Taylor 923,782
Heel lift sections, machine for assembling, W. P. Bosworth 923,485
Hinge, G. H. Davis 923,250
Hinge, J. E. Ahlvin 923,177
Hinge, A. J. D. Heins 923,400
Hoisting apparatus, N. W. Morley 923,518
Hoop, C. H. Keeshin 923,685
Hoops onto kegs, machine for driving, E. F. Beugler 923,187
Horseshoe calk, J. P. Hoppesch 923,759
Hose coupling cap, G. A. Madison 923,177
Hose reel, Blaisdell & Baldwin 923,545
Hot air furnace, M. J. & H. B. Farquhar 923,320
Ice cream freezer, F. Tyson 923,347
Ice making machine, T. H. Ray 923,009
Incandescent furnace, dome-shaped, Burger & Williams 923,298
Index, card, F. C. Williams 923,404
Indicator lock, M. J. Ruddy 923,471
Inhaler, filtrative, S. Danielewicz 923,584
Insulated hanger, L. Steinberger 923,776
Insulating sheet metal, W. R. Whitney 923,597
Interlocking switch and signal system, E. K. Post 923,228
Internal combustion engine, J. G. A. Kitchen 923,702
Internal combustion engine, E. Munsch 923,536
Journal box lid, A. O. Buckius, Jr 923,760
Journal box, safety, W. N. Tanner 923,462
Journal box, safety, G. B. Shipley 923,718
Kinematographic films, machine for coloring, E. A. Ivatts 923,492
Kinematographs and talking machines, checking apparatus for synchronously running, J. Greenbaum 923,511
Kite parachute, F. E. Jackson 923,181
Kneading and molding machine, combined bread, C. & E. J. Kruse 923,360
Labeling machine, bottle, E. Ermold 923,501
Ladder, step, J. A. Clough 923,246
Lamp burner, F. A. Schuets 923,309
Lamp extinguisher, H. A. Boyington 923,622
Lamp globe, J. L. Dinsmoor 923,158
Lamp, incandescent, R. McNeill 923,797
Lamp, incandescent gas, H. M. Eagon 923,631
Lamp, inverted incandescent gas, O. Wiederhold 923,469
Lamp socket lock, incandescent, A. L. Lowe 923,284
Land roller, J. Hessennuer 923,431
Lantern, C. I. Mitchell 923,288
Lantern guard, C. L. Betts 923,483
Lasting machine, boot and shoe, L. B. Stamm 923,452
Latch, door, E. Zwiller 923,233
Leather, machine for applying metal ornaments to, D. C. Sasseman 923,300
Leg, artificial, H. T. Odgers 923,798
Leveling device, Anderson & Flavin 923,612
Lifting jack, M. L. Jenkins 923,657
Linotype matrices, swage or reshaper for deformed or battered teeth of, P. E. Kent 923,275
Liquid raising apparatus, V. Schwaninger 923,587
Locks, roll back hub for, A. Arens 923,755
Locomotive for logging, J. R. McClifford 923,584
Loom, H. W. Smith 923,723
Loom selecting device, haircloth, J. S. Cox 923,144
Loom stop motion mechanism, J. D. Whitney 923,393
Loom, weft replenishing, M. L. Stone 923,460
Looms, lay for, W. Wattie 923,223
Looms, weft supplying mechanism for automatic weft-replenishing, E. S. Stimpson 923,457
Magnet, air or water blast, Hilliard & Parsons 923,653
Mail bag despatcher, W. Butler 923,623
Mail bag handling device, F. E. Herbert 923,174
Mail cart, V. C. Koons 923,278
Mail crane, catcher, and deliverer, combined, J. W. Pepple 923,290
Mail delivering and collecting apparatus, W. L. Corthell 923,336
Marine port screen, C. A. Wilson 923,396
Massage device, J. J. Egan 923,156
Match box filling machines, extinguishing means for, C. R. Andersson 923,476
Mattress, woven wire, R. G. Marquardt 923,286
Measure, liquid, S. E. Blizard 923,618
Measuring and delivering device, skim milk and whey, C. A. Johnson 923,183
Measuring instrument recorder, electrical, C. B. Thwing 923,606
Meat clamp, B. W. Jackson 923,337
Meat defiberizing apparatus, G. W. Wemple 923,742
Mechanical movement, D. O. Makean 923,191
Metal working machine, E. B. Sellew 923,440
Micrometer gage, C. O. E. Schellenbach 923,446
Miter box, J. M. Jacobsen 923,268
Money drawer, disinfecting, D. & H. H. Goldman 923,165
Mop and brush holder, J. C. Look 923,282
Mop wringer, J. A. White 923,391
Motor control, automatic, S. H. Kaumacher 923,186
Motor control, single phase, E. F. W. Alexanderson 923,312
Motor starting device, electro, K. von Dreger 923,157
Mower, lawn, C. L. Bergeman 923,403
Music leaf turner, W. D. Parker 923,440
Music leaf turner, W. A. Hext 923,522
Musical instrument, mechanical, J. A. Weser 923,225
Musical instrument player, automatic, I. B. Smith 923,389
Musical instrument playing mechanisms, friction shoe for, G. H. Davis 923,148
Neckwear, G. L. Close 923,400
Neckwear, W. A. Keys 923,534
Nitro compounds, producing, Hoeters & Wolffenstein 923,761
Non-conducting compound, F. J. Jewett 923,358
Nozzle for cans, screw cap, S. Tevander 923,214
Nut lock, M. L. Docker 923,251
Nut lock, A. J. Hathcox 923,264
Nut lock, F. E. Mensinger 923,365
Oil cup and axle bearing, F. Heins 923,652
Ordnance, J. J. Bowes, Jr 923,620
Ordnance adjusting gear, N. Bloquist 923,207
Ore extractor, rotary, J. O. Blackburn 923,319
Ores, concentrating, A. H. Stebbins 923,455
Package filling machine, W. H. Doble 923,779
Package tie, W. W. Fowler 923,639
Packing journals of railway cars, composition of matter to be used in, W. M. Simmons 923,204
Packing or shipping receptacle, J. Shellenberger 923,586
Paddle wheel, submerged vertical, L. Vojacek 923,737
Padlock, permutation, J. T. Whalen 923,744
Pan lifter, S. E. Ward 923,389
Pan riffle, J. M. White 923,392
Paper cutting machine, T. C. Dexter 923,154
Paper, device for detecting inaccurately fed sheets of, M. M. Kandle 923,658
Parer and cutter, vegetable, M. L. Hawks, reissue 12,965
Parer, fruit, F. G. Mower 923,561
Passenger recorder, C. Messick 923,287
Pen, drafting, S. D. Shepard 923,717
Pens, ink-feeder for, M. Carey 923,486
Perforating and punching instrument, F. H. W. Higgins 923,792
Permutation lock, J. T. Whalen 923,745
Petroleum sludge, separating acid from, J. L. Gray 923,429
Petroleum sludge to produce pitch, asphalt, etc., treating, J. L. Gray 923,427
Petroleum sludge, treating, J. L. Gray 923,428
Photographic film drying device, A. M. Banks 923,481
Photographic films, manufacture of, J. H. Smith 923,589
Photographic light diffusing apparatus, N. Losey 923,542
Piano playing and recording instrument, combined electrical, G. H. Davis 923,147
Picker. See Cotton picker.
Picture holder, L. A. Wildhack 923,394
Pictures, making, C. W. Saalburg 923,709
Pile fabric, woven, W. A. Minifie 923,092
Piling, sheet metal, N. E. Marsh 923,364
Pin and clevis, A. O. Buckius 923,767
Pipe coupling, G. W. Millar 923,681
Piston for disk meters, etc., oscillating disk, G. De Laval 923,497
Plastic materials, mold for compressing slightly, J. Draenert 923,780
Plow lay holder, E. Mack 923,675
Plowshare, J. Christa 923,138
Plug, separable attachment, H. Hubbell 923,179
Pneumatic action, universal, H. Meyer 923,548
Pneumatic despatch apparatus, C. F. Stoddard 923,458
Pneumatic despatch tube apparatus, Ames & Litchfield 923,237
Pneumatic despatch tube apparatus, I. W. Litchfield 923,281
Pneumatic despatch tube apparatus, carrier for, I. W. Litchfield 923,280
Pneumatic despatch tube system, C. F. Stoddard 923,508, 923,459
Pneumatic, straight lift, W. E. Haskell 923,263
Porous material, purification of, W. R. Whitney 923,745
Porous materials, purification of, W. R. Whitney 923,227
Posting post, F. H. Crump 923,775
Printing machine, R. G. Prendes 923,703
Printing press, F. Waite 923,220
Printing presses, bearer for, W. C. Deane 923,415
Printing transfer designs on paper in two or more colors or mediums, apparatus for, W. Briggs 923,242

Classified Advertisements

Advertising in this column is 75 cents a line. No less than four nor more than ten lines accepted. Count seven words to the line. All orders must be accompanied by a remittance. Further information sent on request.

READ THIS COLUMN CAREFULLY.—You will find inquiries for certain classes of articles numbered in consecutive order. If you manufacture these goods write us at once and we will send you the name and address of the party desiring the information. There is no charge for this service. **In every case it is necessary to give the number of the inquiry.** Where manufacturers do not respond promptly the inquiry may be repeated.

MUNN & CO.

PATENTS FOR SALE.

FOR SALE.—Patent No. 912,708. Hand massage machine. Only one of the kind in the world. Will sell you all rights, including tools for making same, and turn over orders for 15,000 machines. Money wanted to invest in another line at once. A snap and will be sold in a few days. Address Box 816, Kalamazoo, Mich.

Inquiry No. 8868.—Wanted to buy nickeloid for buttons.

FOR SALE.—Patent No. 757,908.—Typebar for first-class visible typewriter that is cheap to manufacture. Carries its own guide, furnishing perfect and permanent alignment under heavy manifolding. Address John Winsor, 146 Mott Street, Corry, Pa.

Inquiry No. 8904.—Wanted to buy new or second hand machinery for making "bow type" mouse and rat trap springs and wire parts, single machine or full outfit.

FOR SALE.—U. S. patent on spring wheel to use on anything from a locomotive to a toy baby carriage. No trouble or expense for repairs. They last longer than any ordinary wheels. Do not slip on ice or sand. They ride easy and are noiseless. Price fifty thousand dollars. Address S. H. Burgess, Mullin, Texas.

Inquiry No. 8908.—For a dealer in tapes and cords for Venetian blinds.

FOR SALE.—Two patents on reinforced concrete block interlocking grain elevator (or grain bins). Perfect air draft ventilation. Fire and moisture proof. Engineer estimates 150 per cent. saving on cost of construction. Patent Nos. 869,984 and 894,122. Full particulars on request. Thomas Dougherty, inventor and owner, 624 18th Avenue S., Minneapolis, Minn.

Inquiry No. 8918.—For manufacturers of "Wydt's Electro-Catalytic Sparking Plug."

FOR SALE.—Patent will issue shortly. Credit account file cabinet. Best money making proposition invented in years. Most perfect system for merchants. M. L. Stegmaier, 13 N. Center St., Cumberland, Md.

Inquiry No. 8921.—For the manufacturers of gilt paper.

FOR SALE OR LEASE.—Man with $2,000 can secure patent on clothes pin and pulley, with all machines and patterns. With this pin clothes can be hung on both sides of line. Big money for right man. No agents. F. Miller, 1119 Park St., Peekskill, N. Y.

Inquiry No. 8923.—Wanted the address of Worthington Boiler Co.

CAR FENDER.—I have the only combined manual and automatic which meets every requirement of safety appliance laws. Desire correspondence with manufacturers. Prefer to sell. F. C. Austin, Bullard Bldg., Los Angeles, Cal.

Inquiry No. 8928.—For the manufacturers of a steam rotary excavator as described in the Scientific American of December 12, 1908, page 467.

FOR SALE.—Patent No. 919,667. Drying and Stretching Frame. For further information and particulars, address T. A. Hargrave, Galveston, Tex.

Inquiry No. 8931.—For parties who manufacture the Western Stump Borer for boring stumps.

PATENT No. 911,068. Small, perfect taut-thread toothpick that can be made and retailed profitably for 10 cents or less each. Adam C. Perkins, 64 V St., Washington, D. C.

Inquiry No. 8936.—Wanted machinery used to spin or wrap paper pencils in the manner that paper pencils are made.

PARTNERS WANTED.

CAPITALIST OR PARTNER WANTED by the inventor of patent No. 910,488 on aerial navigating apparatus. His object is to secure capital to pay for foreign patents and in promoting the improvements and experimenting of the aerial flying machine. The inventor will only sell a half interest. A grand opportunity for the right party. J. D., Box 773, N. Y. City.

Inquiry No. 8941.—For manufacturers of machinery for making dry screens.

FOR SALE.

ADVERTISER has a slightly used hand-operated Burroughs Adding and Listing Machine for sale at a liberal discount from the list price of a new machine. This machine is as good as new and will last a lifetime. It has been displaced by the latest style Burroughs electric. I will be glad to quote a price on request. For further particulars and full information address S. A., Box 773, New York.

Inquiry No. 8957.—Wanted manufacturers of angle bars either malleable steel or sheared.

FOR SALE.—Specialty for manufacturers. Dental floss holder, patented May, 1908. For further particulars apply direct to inventor, T. A. Tubbs, Seattle, Wash., care H. S. Emerson Company.

Inquiry No. 8960.—For the address of the Windsor Mfg. Co., manufacturers of waterproof collars and cuffs.

BOOKS AND MAGAZINES.

PATENTS—"How to succeed As An Inventor." My valuable 36-page book, just published. Sent postpaid 10 cents. For full particulars and information, address Goodwin B. Smith, 700 Stafford Building, Philadelphia.

Inquiry No. 8966.—Wanted the address of the Cohendet Motor Co.

LISTS OF MANUFACTURERS.

COMPLETE LISTS of manufacturers in all lines supplied at short notice at moderate rates. Small and special lists compiled to order at various prices. Estimates should be obtained in advance. Address Munn & Co., List Department, Box 773, New York.

Inquiry No. 8969.—Wanted machines that make accordion dress plaiting (steam).

A LIST OF 1,500 mining and consulting engineers on cards. A very valuable list for circularizing, etc. Price $15.00. Address Munn & Co., List Department, Box 773, New York.

Inquiry No. 8972.—Wanted to buy complete outfit for making meat hooks.

Inquiry No. 8974.—For address of firms interested in fishing reels.

Inquiry No. 8975.—Wanted the address of the builders of moving stair cases.

Inquiry No. 8977.—For manufacturers of machinery for manufacturing denatured alcohol.

Inquiry No. 8978.—Wanted the address of manufacturers of dry pans or crushers to grind sand for plastering and cement works.

Inquiry No. 8980.—For the address of manufacturers of mortars and pestles that are used by druggists.

Inquiry No. 8982.—Wanted a machine or process for slitting or laminating the edges of heavy cardboard, impregnating the slit or laminated edge with a waterproof material and compressing the edge after treatment. The object of the process is to produce an edge that shall be waterproof and which shall not fray or split when in use.

Inquiry No. 8984.—Wanted the address of the manufacturers of Cypress wash tubs.

Inquiry No. 8986.—Wanted to buy crown and flint glasses for telescope objectives.

Inquiry No. 8987.—Wanted, the manufacturers of the Van Winkle, Woods & Sons, and the Weber power meters.

Inquiry No. 8988.—Wanted to buy a large building or abandoned manufacturing plant having a large water power in a populous town.

Inquiry No. 8989.—Wanted a machine for making cocoa fiber mats.

Inquiry No. 8990.—For information regarding shoes not made of leather but similar to the same and are as durable.

Inquiry No. 8991.—Wanted to communicate with manufacturers of large straw hats for every-day wear.

Inquiry No. 8992.—Wanted to buy cheap glass eyes suitable for images of animals, etc.

Inquiry No. 8993.—Wanted to buy producer gas plants.

Inquiry No. 8994.—For manufacturers of an apparatus to produce very high temperatures.

Inquiry No. 8995.—Wanted to buy round and oval glass paper weights, such as are used for mounting photographs.

Propelling device, boat, N. F. Loomer	923,283
Proportional meter, French & Hiller	923,258
Pulley, O. K. Harry	923,790
Pulp agitator, W. C. Paterson	923,571
Pump, air lift, O. E. Harris	923,169
Pump, dispensing, M. H. Pettigor	923,701
Pump, reciprocating hydraulic, R. Wood	923,748
Punching and riveting machine, J. B. French	923,350
Punching bag, S. H. Selfe	923,379
Punching machine, McIntyre & Rogers	923,198
Puzzle apparatus, E. C. S. Parker	923,372
Radiator cover, Larsen & Johnson	923,698
Rail joint, A. Chriske	923,331
Rail joint, J. J. Galey	923,351
Rails, device for preventing the creeping of, H. Dorpmuller	923,417
Rails to ties, device for fastening, J. J. Russell	923,708
Railway rail, renewable head, R. B. Davis	923,150
Railway rails, anticreeping device for, D. F. Vaughan	923,388
Railway signal device, automatic, J. W. Johnson	923,793
Railway switch mechanism, C. B. Rice, Jr.	923,580
Railway tie and rail fastening means, metal, M. F. McLean	923,370
Railway tie, metallic, Snyder & Cronk	923,307
Railway track hanger, overhead, F. Schraudner	923,448
Railway track structure, A. Stark	923,453
Rakes, hoe attachment for, J. Dalpay	923,624
Rattle, Leedy & Wanamaker	923,572
Razor, safety, R. H. Reed	923,579
Rectifier, G. W. Pierce	923,700
Reel, F. J. Moser	923,559
Reflector for miners' lamps, Hough & Weaver	923,655
Refrigerating apparatus, compressed air, C. Tellier	923,604
Refrigerators, ice chamber for, W. H. Carter	923,624
Relay, A. S. Cubitt	923,247
Relay and making the same, J. S. Pevear	923,702
Rewinding mechanism, H. Meyer	923,549
Roadways, footways, and the like, construction of, G. A. Mitchell et al	923,196
Roasting chestnuts and the like, device for, T. E. Attwell	923,756
Rocking device, G. W. Gooding	923,509
Rod connection, C. G. Sprado	923,724
Rolling mill feed mechanism, Lambert & Cardozo	923,180
Rolling mill, rod, H. L. Thompson	923,216
Rope knife, H. A. Beasley	923,482
Rotating parts, method and means for working eccentrically, E. Thunberg	923,732
Safe, coupon, C. F. Jones	923,532
Salt and pepper shaker, combined, Hastings & Bilbro	923,650
Sample case having link connected trays, Schweitzer & Labadie	923,378
Sap collecting device, F. B. Turner	923,386
Sash cord fastener, H. M. Hardy	923,168
Saw filing machine, W. J. Holmes	923,266
Saw frame, folding, A. Luzzatti	923,543
Sawmill set works, C. E. Cleveland	923,408
Sawmill set works, rope driven, U. Anderson	923,314
Scale, L. Jaenichen	923,530
Scale, platform, T. V. Malone	923,285
Screen. See Marine port screen.	
Screens, apparatus for projecting images on, C. P. De Soria	923,209
Sealing machine, envelop, M. E. Mayo	923,193
Seam ripper, W. Newton	923,567
Seaming machine, double, Nelson & Ostlin	923,688
Seaming machine, stationary can double, Nelson & Ostlin	923,687
Seat. See Car seat.	
Seismometer, J. M. Wood	923,397
Self-regulating furnace, M. J. & H. B. Farquhar	923,346
Sewing machine, R. G. Woodward	923,750
Sewing machine wheel handle, detachable, Gorton & Richards	923,354
Shade and umbrella holder, adjustable, A. E. Staples	923,596
Shaft coupling, T. A. Edison	923,633
Shaft coupling, G. S. Searle	923,714
Shafts, means for fixing bosses upon their, S. Masters	923,678
Shearing machine, A. E. Peters	923,293
Shears or scissors handle, C. W. Tisdall	923,734
Shears or scissors, tension device for, W. M. Bowes	923,621
Sheet delivery mechanism, E. W. Dean	923,151
Sheet inserter, J. L. Brown	923,225
Shell or member, finishing, J. H. Glauber	923,164
Shelving, adjustable, A. A. Smith	923,721
Shipping box, F. C. Mitchell, reissue	12,998
Shipping box or crate, H. J. Williams	923,395
Shoe tree, J. E. Baker	923,479, 923,480
Signal light, T. L. Wilson	923,474
Signal system, L. A. Hawkins	923,170
Signaling apparatus, train, G. A. Shoemaker	923,719
Sink table and bath tub, portable and separable, C. B. Schmitt	923,203
Skater's support, W. S. Miller	923,550
Skid, P. Buhl	923,487
Skirt marker, D. Goodale	923,166
Silver can, J. P. Crane	923,493
Soap dispensing attachment for washstands, toilet, G. A. Schmidt	923,447
Sounding machine, navigational, W. Thomson	923,384
Speed controller and power transmitter, fluid clutch, R. E. Newcomb	923,565
Speed mechanism, variable, T. J. Bianchi	923,321
Speed mechanism, variable, S. R. Gray	923,788
Spittoon and ash receiver, combined, M. Mayer	923,192
Splice bar, E. R. Eldridge	923,634
Spoons, forks, etc., cleaning machine for, J. L. Sanders	923,710
Spraying device, A. Klinger	923,277
Spring coiling mechanism, H. McCormack	923,563
Spring suspension, A. P. Brush	923,765
Spring wheel, J. Pfliegel	923,161
Spring wheel, T. W. Gratz, Jr.	923,645
Spring wheel, J. E. Rielly	923,707
Sprinkling of liquids, device for the uniform, H. Mikorey	923,550
Stacker turn tables, friction wheel for, H. T. Seburn	923,204
Staking tool, F. R. Cunningham	923,495
Stave machine, S. R. Anderson	923,477
Steam generator, C. Cretors	923,145
Steam generators, etc., door for, T. Downie	923,156

Ten Years' Profits Saved

When your factory, store or warehouse burns—your insurance doesn't begin to cover your real losses. It may cover the greater part of the goods and building. But not the thousands of dollars you lose in business you can't take care of—in the extra expense of doing business under a heavy handicap—in the loss of the workmen you have brought up in your business—in the greater cost of rebuilding—and in the permanent inroads it gives your competitors opportunity to make in the trade you have built up.

When your home is burned—your insurance can't cover the real worth of your personal property and family treasures which no money can replace. It can't give you back any lives that may have been sacrificed.

Though the city fire department you are depending on may be a good one—it's the valuable time lost before they get there that gives your fire its headway.

BADGER 40-GALLON CHEMICAL ENGINE

Stop the fire when it starts

It will give you your own fire protection—your own efficient fire department—a fire equipment capable of immediate action—more effective than thousands of pails of water.

The Badger Chemical Engine gives you a most effective fire department. It has a narrow tread and will go through any three foot opening. It throws a stream 75 to 85 feet sufficient to extinguish all incipient and many well started fires. It is more effective in extinguishing a blaze than thousands of gallons of water. In fact, it puts out oil and gasoline fires which water would spread, and extinguishes fires which water could not reach—due to the chemical action of the engine in generating a gas which acts as a blanket on the fire. Does not flood premises with water and cause additional loss. Stream can be instantly stopped by shutting off the nozzle. Operated easily by one man. Requires no experience. Costs practically nothing to maintain. All chemicals necessary are sold at any drug store.

The Badger 40-Gallon Chemical Engine is built to meet the requirements of the National Board of Fire Underwriters and bears the *inspection label* of the Underwriters' Laboratories. It not only comes up to the Underwriters' standard of efficiency, but is the best built engine of its size on the market. Ask your Insurance Broker and he will verify just what we say.

This is of vital importance and demands your careful consideration when buying fire extinguishers on which depend the saving of your property—the saving of life

Badger Fire Extinguisher Co., 32 D Portland Street, Boston, Mass.

FREE TRIAL OFFER This is our offer: We will ship you an engine, with two chemical charges, freight prepaid, and allow you 30 days' free trial. If it does not meet your requirements you can return it to us at our expense. This enables you to build test fires as large as you like and satisfy yourself absolutely of its efficiency before you pay for it.

Cut off the attached coupon and mail to us, and we will send you descriptive Catalog T, prices, and all information on this free trial offer.

Please send me Booklet D and details of your trial offer.

Street.....

Name.....

City.....

BADGER FIRE EXTINGUISHER CO., 32 D Portland St., Boston, Mass.

WE MAKE ALL KINDS

This Shows our 3-Gallon Extinguisher

"SINTZ" REVERSING PROPELLERS

As strong as a solid wheel — No solid wheel is speedier

For safety your boat must have a reverse gear or reversing propeller. Cheap gears are worthless. Good ones cost like blazes—and—a good gear is not as strong nor as durable as a "Sintz" Reversing Propeller, and the "Sintz" costs less money. Sounds pretty strong, but let us prove it.

In the "Sintz" Reversing Propeller are combined perfect control over both speed and direction; adjustable pitch, elimination of grease, dirt, wasted space and power. We are dead certain that the "Sintz" is king of all reversing devices—that it will satisfy you. We'll back up that statement by refunding purchase price on any "Sintz" Wheel that does not satisfy, paying freight both ways. We want you to have our catalog. It contains the whole proposition in concise form. Send today.

Wilmarth & Morman Co., 614 Canal St., Grand Rapids, Mich.

Just Turn The Faucet

and have the washing done in half the time by water pressure. No Back Aches or Wash Women! The "Simplex" works perfectly on 20lbs. or more, a trial convinces. Sold complete or separate motor to be attached to your hand machine for $12.50. AGENTS—This motor sells because it WASHES Clothes. New proposition, nothing like it, women want it, send for booklet today.

Agents Wanted

SIMPLEX WASHER CO. MILWAUKEE, WIS.

DO YOU USE GRINDSTONES?

If so we can supply you. All sizes **mounted** and **unmounted**, always kept in stock. Remember, we make a specialty of selecting stones for all special purposes. *Send for catalogue "L."*

The CLEVELAND STONE CO.
6th Floor, Hickox Bldg., Cleveland, O.

Just Published—A BOOK OF INTEREST TO RIFLEMEN

The Bullet's Flight from Powder to Target

The Internal and External Ballistics of Small Arms. A Study of Rifle Shooting with the Personal Element Excluded, Disclosing the Cause of the Error at the Target.

Illustrated with one hundred and eighty-eight plates, showing the results of over three hundred rifle experiments performed and chronologically arranged

By F. W. MANN, B.S., M.D.

Size 7½ x 9¾ inches. 384 Pages. Price $4.00 postpaid

THIS is a thoroughly practical treatise and deals with a subject the literature of which is not commensurate with its importance or interest, and it possesses unusual value, not only because it furnishes a large amount of information, of a very practical kind, but because this information is the result of a practical experience on the part of the writer, extending over a period of thirty-eight years. The results of the author's experiments, as here given, have been persistently and laboriously worked out with an earnest desire to assist his fellow marksmen. In view of the fact that conjecturing and theorizing have been so prevalent in rifle literature, the work has been kept free from speculation, except where they have either been proved to be false or have been fully substantiated by recorded experiments. Most of the illustrations are photographic reproductions of the results of actual tests. Every page is full of interest for the rifle enthusiast. There is a full discussion of various kinds of rifles, of the effect of difference of length, of variations of rifling, etc., as well as of instructive experiments such as that of venting the barrel near the muzzle. An idea of the contents may be gathered from a few of the subjects treated, such as the Personal Element vs. Mechanical Rifle Shooting; Utility of Vented Barrels; High-Pressure Sharpshooting Powder; Telescope Mounts; Ruined Rifle Bores vs. Smokeless Powder vs. Primer; Accurate Ammunition Difficulties; Flight of Bullets; Gyration and Oscillation; Motions Executed by Normal Flying Bullets; Determining Rifle Twists; Kinetics of Spin, etc. In many respects this work is unique in the literature that has been published on this subject. It is a thoroughly practical work and will be found to be of very real value to those who are engaged in a study of the ballistics of the rifle with a view of improving the all-around efficiency of that weapon.

MUNN & COMPANY, Publishers, 361 Broadway, New York City

$54.00 per day
The Record of the **CAMERA-SCOPE**
And we can prove it. Anyone can operate it. Makes 6 finished button photographs a minute. Price of Camera-Scope, with supplies for making 360 pictures (enough to pay for the complete outfit) **$25.00.** Extra buttons $1 per hundred; extra frames $1.50 per gross. Be independent and make money for yourself. Write today.
W. S. MOUNTFORD, 100 Malden Lane, New York, N.Y.

2 H.P. Stationary Engine $29.50 ENGINE ONLY
2½ to 8 H. P. Proportionate Prices.
For use on the farm and in the shop.
Runs cream separators, churns, pumps, corn sheller, washing machines, printing presses, saws. Burns kerosene, (coal oil,) alcohol, gasoline, distillate, without change of equipment, starts without cranking, throttling governor, drop forged crank shaft, best grade babbitt bearings, free catalog tells how to save half cost of hired help. Testimonials. 10,000 in use. All sizes ready to ship.
DETROIT ENGINE WORKS
127 Bellevue Avenue, Detroit, Michigan

For Everybody
wishing to bore a hole in steel, iron or wood. We make drills in 9 sizes. Our large size will drill a 2½-inch hole in steel. Our Electric Midget weighs only 4 pounds, and will drill in steel up to 3-16 inch. Great for manual training schools. We also make electric drill grinders. Let us send one on 10 days' trial. Send for catalogue.
THE CINCINNATI ELECTRIC TOOL CO.
650 and 652 Evans Street, Cincinnati, Ohio, U. S. A.

ICE YACHT BUILDING.—COMPLETE details for the construction of Ice Yachts, with many illustrations, are contained in SUPPLEMENT Nos. **624, 1154, 1197** and **1253.** Each number gives plans of a different boat. Price 10 cents each. For sale by Munn & Co. and by all newsdealers.

GEER MOTORCYCLES

5-H. P. 2-Cylinder Green Egg, $225.00
4-H. P. Blue Bird 200.00
2½-H. P. Geer, Model A. 150.00
Used Motorcycles 40.00
We have the largest line of new and used Motorcycles in the country at the lowest prices. Every machine guaranteed. Repairs a Specialty. Motors and Castings for Air Ships. Motors for railway velocipedes. Send for Catalog.
HARRY R. GEER CO., 851 McLaran Ave., ST. LOUIS, MO.

MARSTON'S
Patent Hand Foot & Power Circular & Band Saws
Send for Catalogue
J. M. MARSTON & CO.
247 Ruggles St., Boston, Mass.
Foot Power Circular Saw

Bliss Electrical School
20 Takoma Ave., Washington, D. C.
Offers a theoretical and practical course in ELECTRICITY, complete in one year. Students actually construct Dynamos, Motors, etc., and are trained for good positions in electrical industries. 17th year opens September 22. Send for Catalog.

Concrete, Reinforced Concrete AND Concrete Building Blocks

Scientific American Supplement 1543 contains an article on Concrete, by Bryson Cunningham. The article clearly describes the proper composition and mixture of concrete and gives results of elaborate tests.

Scientific American Supplement 1538 gives the proportion of gravel and sand to be used in concrete.

Scientific American Supplements 1567, 1568, 1569, 1570, and **1571** contain an elaborate discussion by Lieut. Henry J. Jones of the various systems of reinforcing concrete, concrete construction, and their applications. These articles constitute a splendid text book on the subject of reinforced concrete. Nothing better has been published.

Scientific American Supplement 997 contains an article by Spencer Newberry in which practical notes on the proper preparation of concrete are given.

Scientific American Supplements 1568 and 1569 present a helpful account of the making of concrete blocks by Spencer Newberry.

Scientific American Supplement 1534 gives a critical review of the engineering value of reinforced concrete.

Scientific American Supplements 1547 and 1548 give a resume in which the various systems of reinforced concrete construction are discussed and illustrated.

Scientific American Supplement 1564 contains an article by Lewis A. Hicks, in which the merits and defects of reinforced concrete are analyzed.

Scientific American Supplement 1551 contains the principles of reinforced concrete with some practical illustrations by Walter Loring Webb.

Scientific American Supplement 1573 contains an article by Louis H. Gibson on the principles of success in concrete block manufacture, illustrated.

Scientific American Supplement 1574 discusses steel for reinforced concrete.

Scientific American Supplements 1575, 1576, and 1577 contain a paper by Philip L. Wormley, Jr., on cement mortar and concrete, their preparation and use for farm purposes. The paper exhaustively discusses the making of mortar and concrete, depositing of concrete, facing concrete, wood forms, concrete sidewalks, details of construction of reinforced concrete posts.

Each number of the Supplement costs 10 cents.
A set of papers containing all the articles above mentioned will be mailed for $1.50.
Order from your newsdealer or from
MUNN & CO.
361 Broadway, New York City

Steel, consolidating flue dust for use in the manufacture of, W. Thomlinson 923,605
Steering gear, C. F. Strawn 923,210
Steering gear, A. D. Wilt, Jr. 923,230
Stitching machine, wire, R. H. Brown 923,134
Stopple mold, W. F. Schacht 923,585
Stovepipe fastener, W. B. Fhares 923,441
Strainer, W. H. Heard 923,651
Stuffing box, J. W. Ladd 923,671
Surgical ligatures, manufacture of, A. W. Clark 923,768
Surgical table, J. O. Hunter 923,656
Swimming and life saving apparatus, L. E. Clawson 923,407
Switch operating device, G. M. Spalding 923,590
Swivel coupling, B. Henley 923,519
Table lock, extension, W. Koester 923,795
Tablet, erasive, J. S. Rapson 923,576
Tank band fastener, F. C. Stuckel 923,211
Telautograph, G. S. Tiffany 923,385
Telegraph, printing, H. W. Bull 923,488
Telegraphy, wireless, G. W. Pierce 923,699
Telephone apparatus, W. H. Taylor 923,603
Telephone appliance, M. P. Flack 923,637
Telephone system signaling means, F. S. Davenport 923,499
Thermoplastic compound of blood or egg proteid, B. B. Goldsmith 923,353
Thread, singeing device, G. Gin & V. Courtecuisse 923,425
Threads or artificial silk, apparatus for producing and treating viscose, A. Delubac 923,777
Threshing machine attachment, C. A. Brost 923,324
Threshing machine teeth, fastening for, O. Wallschlaeger 923,221
Time record sheet, W. D. Hawley 923,265
Timer and distributer, H. L. Radford 923,442
Tire bolt wrench, B. Langlotz 923,538
Tire fabrics, weaving, E. Herkner 923,520
Tire, pneumatic, A. Latimer 923,279
Tire protector, automobile, A. B. Boughan 923,322
Tire, puncture proof, E. J. C. Timerman 923,733
Tire, resilient, N. H. Hassel 923,516
Tobacco pipe, Drake & Smith 923,419
Tobacco pipe, H. Lutz 923,674
Tongs, shelf, E. S. Savage 923,376
Tool, mechanic's, J. O. Anderson 923,313
Tower or pole, F. Milliken 923,557
Toy water mill, J. & R. Gaube 923,640
Track construction and electric signaling and controlling equipment thereof, G. Thompson 923,800
Trap. See Fly trap.
Traveling bag, R. Ponickau 923,373
Trestle, E. W. & C. A. Cornett 923,492
Tripping device, C. G. Sprado 923,592
Trolley, H. Lietz 923,540
Trolley stand, E. W. Stull 923,601
Trousers, combination, W. H. Farley 923,345
Truck, C. Hebert 923,171
Truss, hernia, G. Christodulo 923,625
Tube cutting machine, A. Mill 923,554
Tube machine, A. Mill 923,552
Tube rolling apparatus, Stiefel & Nicholson 923,726
Tube rolling machine, A. Mill 923,553
Tubing support, flexible, H. A. Kretschmer 923,662
Tuft, C. Koella 923,537
Turbine, J. W. Smith 923,851
Turbine, elastic fluid, C. G. Curtis 923,146
Turning crank pins and eccentrics, machine for, C. Vogel 923,219
Turning tapered work or balls, attachment for, W. Z. Bean 923,757
Turpentine cup, F. B. Turner 923,387
Twist drill, O. Fredrickson 923,257
Type for numbering wheels, removable, B. B. Conrad et al 923,773
Type, etc., machine for making dies or matrices for the manufacture of, L. A. Diss 923,252
Typewriter, coin controlled, E. Colwell, Jr. 923,142
Typewriter locking mechanism, coin-controlled, E. Colwell, Jr. 923,143
Typewriter machines, time controlled, coin operated locking device for, H. Bates, reissue 12,907
Typewriting machine, A. T. Brown 923,243
Typewriting machine, C. P. Mosher 923,438
Typewriting machine, J. Felbel 923,503
Typewriting machine, C. W. Howell 923,527
Typewriting machine, W. H. Woodford 923,749
Typewriting machine, A. T. Brown 923,763
Umbrella, J. Beaudry 923,130
Underreamer, C. T. Mapes 923,677
Universal joint, B. O. Rhodes 923,443
Unloading device, J. Tribe 923,607, 923,608
Valve, A. E. Kenney 923,274
Valve, D. G. Davis 923,413
Valve, C. I. Williams 923,470
Valve, W. E. Werd 923,611
Valve, G. H. Benton 923,616
Valve for air brakes, triple, J. Doyen 923,418
Valve for steam heating systems, water and air, E. W. Comfort 923,333
Valve, gas engine, F. G. Hobart 923,524
Valve guard, W. Thompson 923,731
Valve, inflation, J. E. Keller, Jr. 923,359
Valve mechanism, steam engine, E. L. Bowen 923,486
Valve operating mechanism, G. W. Dunham 923,422
Valve operating mechanism, A. M. Houser 923,526
Valve, pressure reducing, F. Nicola 923,568
Valve, throttle, F. C. Pahlow 923,190
Vehicle jack and lifter, D. L. Stearns 923,454
Vehicle, motor, S. B. Gray 923,167, 923,789
Vehicle shock absorber, E. A. & C. A. Garvey 923,162
Vehicle steering gear, D. E. Ross 923,583
Vehicle suspension, Brown & Whitney 923,764
Vehicle wheel, resilient, H. G. Mackinney 923,436
Vehicle wheel, road, F. Shaw 923,205
Vending apparatus, Bishop & Chaple 923,132
Vessel, double walled, G. P. Altenberg 923,220
Vessel, double walled, H. Henn 923,791
Vessels, making double walled vacuum, R. Burger 923,136
Vibrator, W. F. Acton 923,234
Vibrator, M. K. Golden 923,508
Vibrator and timer, combined, W. S. Newcomet 923,566
Vise, C. R. Kelly 923,659
Voltage regulator, F. Conrad 923,627
Vulcanizing apparatus, W. H. Welch 923,224
Vulcanizing apparatus, A. F. Cogswell 923,772
Wagon, dump, J. F. Eccard 923,253
Water jig, G. Caetani 923,328
Water tube boiler, sectional, T. Gowen 923,510
Waterproofing preservative dressing, J. H. Hoelscher 923,176
Weighing and vending machine, coin actuated, P. R. Chase 923,245
Weighing apparatus, A. Bradford 923,240
Well points, device for securing screens in, Palmer & Scoville 923,371
Wheat binder attachment, S. J. Maixner 923,676
Wind power machine, J. Perry 923,698
Winding and rolling machine, ball, A. G. Brewer 923,702
Window, G. Costello, Jr. 923,628
Window guard, M. R. Dennhardt 923,153
Window lock, H. E. Packer 923,696
Window, ventilating, A. F. Smith 923,450
Windows, means for warming show, J. J. Davis 923,149
Wire fabric machine, Grimm & Drexler 923,645
Wire fabric machine, J. L. Claudin 923,771
Wire splicer, H. A. Schermerhorn 923,586
Wire straightening machine, C. A. Stone 923,599
Wooden stave pipe, W. E. Phillips 923,694
Woodworking machine, H. B. Randall 923,704
Wrench, C. E. Drake 923,420
Wrench, L. R. Blackmore 923,617
Wrench, J. E. La Dow 923,665
Wrist supporter, J. J. Tyrrell 923,217
Zinc dust, manufacture of, S. O. Cowper-Coles 923,411

A printed copy of the specification and drawing of any patent in the foregoing list, or any patent in print issued since 1863, will be furnished from this office for 10 cents, provided the name and number of the patent desired and the date be given. Address Munn & Co., 361 Broadway, New York.

Canadian patents may now be obtained by the inventors for any of the inventions named in the foregoing list. For terms and further particulars address Munn & Co., 361 Broadway, New York.

WOULD YOU INVEST ONE DOLLAR TO MAKE SIX DOLLARS?
We furnish all equipment to start you in the Big Money Making Concrete Business. Sand, water and Portland Cement only materials required. *Write us!* **The Pettyjohn Co.,** 615 N. 6th St., Terre Haute, Ind.

DON'T LET YOUR PATENT LIE IDLE. We'll make dies and tools and manufacture your article ready for market. Write now—don't delay. Southern Stamping & Mfg. Co., R. S., Nashville, Tenn.

ICE MACHINES Corliss Engines, Brewers' and Bottlers' Machinery. THE VILTER MFG. CO., 899 Clinton St., Milwaukee, Wis.

MODELS & EXPERIMENTAL WORK. Inventions developed. Special Machinery. E. V. BAILLARD CO., 24 Frankfort Street, New York.

RUBBER Expert Manufacturers Fine Jobbing Work
PARKER, STEARNS & CO., 288-290 Sheffield Av., B'klyn, N. Y.

HOEFT & COMPANY
Die Makers, Model Makers, Machinery Builders, Punch Presses, Light and Heavy Stampings. 130 Michigan St., Chicago, Ill., U.S.A.

DIE WORK MODELS TOOLS SPECIAL MACHINERY
NATIONAL STAMPING AND ELECTRIC WORKS
153-159 S. Jefferson Street, Chicago, Ill.

MODELS & EXPERIMENTAL WORK
Anything from a Watch to an Automobile
CHAS. E. DRESSLER & CO., 141-143 East 23d Street, New York City

Experimental & Model Work
Cir. & advice free. Wm. Gardam & Son, 221 Fulton St., N.Y.

MODELS CHICAGO MODEL WORKS 179 E. MADISON ST. CHICAGO, ILL. ESTABLISHED 1867

DRYING MACHINES For Granular Materials
S. E. WORRELL
Hannibal, Mo., U. S. A.

Magical Apparatus.
Grand Book Catalogue. Over 700 engravings
25c. Parlor Tricks Catalogue, free.
MARTINKA & CO., Mfrs., 493 Sixth Ave., New York

MASON'S NEW PAT. WHIP HOISTS
save expense and liability incident to Elevators.
Adopted by principal storehouses in New York & Boston
Manfd. by VOLNEY W. MASON & CO., Inc.
Providence, R. I., U. S. A.

BE FIRST **LEARN HOW TO INVENT**
Our scientific lessons teach the art by correspondence
Write for free booklet
Scientific School of Invention, Providence, R. I.

SEALED PROPOSALS.
SEALED PROPOSALS will be received at the office of the Light-House Engineer, Tompkinsville, N. Y., until 1 o'clock P. M., June 28, 1909, and then opened, for furnishing materials and labor of all kinds necessary for the construction and delivery of a light-house at Staten Island Rear Range Light-Station, Ambrose Channel, New York, in accordance with specifications, copies of which, with blank proposals and other information, may be had upon application to the Light-House Engineer, Tompkinsville, N. Y.

INVERNESS, SCOTLAND

Notice to Manufacturers and Patentees

Eligible Sites for Factories and Works

ENTERPRISING firms are directed to the Royal Burgh of Inverness (population about 25,000) which is situated at the mouth of the River Ness, and has unrivaled advantages as a Trade Center. Regular and cheap communication with the principal ports of the United Kingdom, and the Continent by rail and sea. Direct communication with the West of Scotland by the Caledonian Canal. Low competitive rates on freight. Excellent harbor accommodation. Ample water supply. Electric energy. Cheap coal gas. Labor plentiful. Climate mild. Local rates and taxes are among the lowest in Great Britain. Every encouragement and facility given to manufacturers by the Municipality. Apply for full information to the Town Clerk, Inverness, Scotland.

MOORE & CO. Special Machinery, Dies, Tools, Models, Metal Specialties, Inventions perfected. Indiana and Franklin Streets, Chicago, U. S. A.

METAL POLISHES.—FORMULAS FOR Putz Pomades, Pastes, Liquids, Powders and Soaps for polishing metals, are contained in SCIENTIFIC AMERICAN SUPPLEMENT Nos. **1287, 1288** and **1289.** Price 10 cents each from this office and all newsdealers

THE BEST EQUIPPED SHOP
For Mechanical and Electrical Manufacturing
Special Machinery, Jigs, Tools, Repairs, Experimental Devices
Designing and Commercializing a Specialty
THE ROWLAND TELEGRAPHIC COMPANY, Baltimore, Md.

MOTORCYCLES
Bicycle Attachments, Motors, Accessories for all Motorcycles. Send stamps for Catalog of what you are interested in.
MOTORCYCLE EQUIPMENT CO., Hammondsport, N. Y.

THE SCHWERDTLE STAMP CO. STEEL STAMPS, LETTERS & FIGURES BRIDGEPORT, CONN.

NOW READY

The Design and Construction of Induction Coils

By A. FREDERICK COLLINS

8vo. 295 Pages and 160 Illustrations, made from original drawings made especially for this book

PRICE $3.00



Reduced Fac-simile Intermediate Sized Induction Coils, Completed, 4, 6, or 8 inch Coil.

THIS work gives in minute details full practical directions for making eight different sizes of coils, varying from a small one giving a ½-inch spark to a large one giving 12-inch sparks. The dimensions of each and every part down to the smallest screw are given and the descriptions are written in language easily comprehended.

Much of the matter in this book has never before been published, as, for instance, the vacuum drying and impregnating processes, the making of adjustable mica condensers, the construction of interlocking, reversing switches, the set of complete wiring diagrams, the cost and purchase of materials, etc. It also contains a large number of valuable tables, many of which have never before been published.

It is the most complete and authoritative work as yet published on this subject.

Following is a list of the chapters:

I. The Development of the Induction Coil.
II. Theory of the Induction Coil Simply Explained.
III. Some Preliminary Considerations.
IV. Forming the Soft Iron Core.
V. Winding the Primary Coil.
VI. The Insulation Between the Primary and Secondary Coils.
VII. Winding the Secondary Coil.
VIII. Winding the Secondary Coil (continued)
IX. Vacuum Drying and Impregnating Apparatus.
X. Constructing the Interruptor.
XI. Building up the Condenser.
XII. Adjustable Mica Condensers.
XIII. Reversing Switches and Commutators.
XIV. Spark-Gap Terminals and Other Fittings.
XV. The Base and Other Woodwork.
XVI. Wiring Diagrams for Induction Coils.
XVII. Assembling the Coil.
XVIII. Sources of Electromotive Force.
XIX. The Cost and Purchase of Materials.
XX. Useful Tables, Formulas, Symbols, and Data.



Reduced Fac-simile, Simple Impregnating Chamber.

Send for full Table of Contents

MUNN & CO., Publishers, 361 Broadway, New York

Holsman Automobiles

High Wheels Travel all Roads, Because all Roads are made to be traveled by High Wheels.

Oldest and largest makers of high-wheeled automobiles in the world. World's record for Hill-climbing and Reliability contests in this class. Only all ball-and-roller-bearing motor made. New friction-chain direct drive—no gears. ***Roadibility*** and ***Reliability*** are the reasons for high wheels and solid rubber tires. Send for our catalog and learn more about these popular, intensely practicable vehicles and their low cost.

HOLSMAN AUTOMOBILE CO. Suite 340 Rosenbaum Bldg. Chicago

Go Anywhere

COLD GALVANIZING

AMERICAN PROCESS. NO ROYALTIES. SAMPLES & INFORMATION ON APPLICATION.



Established 1870.

NICKEL AND **Electro-Plating** Apparatus and Material THE Hanson & Van Winkle Co., Newark, N. J. 28 & 30 S. Canal St. Chicago.

Saves 1/3 The Cost of Your Car

Perfect lubrication—the kind you get from Vacuum MOBILOIL—will run your car a third longer and at a third less expense than if you merely trust to "lubrication," the common, careless, chance-taking kind.

VACUUM

MOBILOIL

is made in 6 different grades, one of which is made for your particular car. It saves you expense and experiment. It protects your car from friction, the hardest, costliest kind of motor wear.

A valuable booklet on motor lubrication will be sent free on application. Lists every automobile made, and shows grade of MOBILOIL necessary for its perfect lubrication. Contains track records up to date, and facts of vital interest to motorists.

MOBILOIL in barrels and in cans with patent pouring spout is sold by dealers everywhere. Manufactured by

VACUUM OIL CO., ROCHESTER, N.Y.

WE SHIP ON APPROVAL

without a cent deposit, prepay the freight and allow **10 DAYS FREE TRIAL.**

IT ONLY COSTS one cent to learn our *unheard of prices* and *marvelous offers* on highest grade 1909 model bicycles.

FACTORY PRICES *Do not buy a bicycle* or a pair of tires from *anyone at any price* until you write for our large **Art Catalog** and learn our *wonderful proposition* on first sample bicycle going to your town.

RIDER AGENTS everywhere are making big money exhibiting and selling our bicycles.

We Sell cheaper than any other factory.

Tires, Coaster-Brakes, single wheels, parts, repairs and sundries at *half usual prices.*

Do Not Wait; write *today* for our *special offer.*

MEAD CYCLE CO., Dept. L 175, CHICAGO

Low Fares to Seattle

$62 for round-trip between Chicago and Seattle for the Alaska-Yukon-Pacific Exposition viz the

CHICAGO MILWAUKEE & ST. PAUL RAILWAY

$62 also for the round-trip between Chicago and Tacoma, Portland, Victoria or Vancouver.

Tickets on sale May 20 to September 30. Return limit October 31. Stop-overs.

Descriptive folder free.

F. A. MILLER, General Passenger Agent, Chicago

Rambler

The Car with the Offset Crank-Shaft.

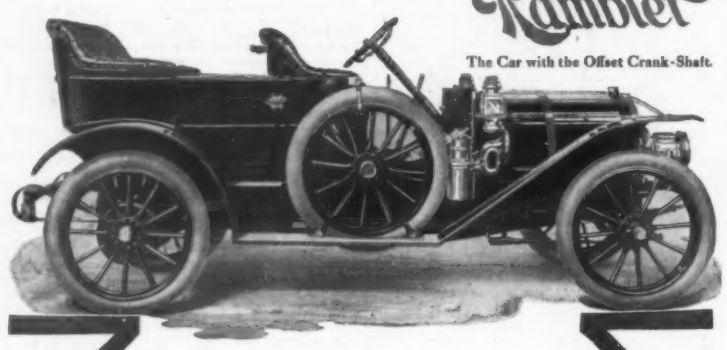

Model Forty-four, 34 H. P., $2,250
Spare Wheel, with Inflated Tire, Brackets, and Tools, $74. Magneto, $190.

Character Coupled with Efficiency

To that purchaser who demands quality without undue elaboration, steady service without sensational performance, and reasonable cost without sacrifice of worth, Rambler Model Forty-four most strongly appeals.

The Offset Crank-Shaft provides for greater power efficiency in hill-climbing and for high-gear work in crowded traffic. The Rambler Spare Wheel obviates all tire worries—saves the task of pumping up the new tire, and can be substituted for the regular wheel within three minutes.

Those big wheels and tires provide comfort in touring, besides saving tire expense.

May we send you the new Rambler catalog or a copy of the Rambler Magazine, a monthly publication for owners? Rambler automobiles, $1,150 to $2,500.

Thomas B. Jeffery & Company

Main Office and Factory, Kenosha, Wis.

Branches and Distributing Agencies:
Chicago, Milwaukee, Boston, New York, Cleveland, San Francisco.

THE CAR OF STEADY SERVICE

AUTOMATIC CARD PRINTER

makes larger profits than any slot machine ever invented. So simple a child can operate it. Attracts large crowds who watch the movements of the mechanism inside the glass case. Can set up name — insert coin — and print twelve calling or business cards in half a minute.

Big Profits to Owners

At Euclid Beach, Cleveland, one machine averaged $26.00 profit a week. One machine in New York took in $14.00 in one day.

Write quick for full information and circular before some one else gets exclusive privilege in your territory. Machines sold outright.

United Vending Machine Co.
815 Huron Road Cleveland, Ohio

BABBITT METALS.—SIX IMPORTANT formulas. SCIENTIFIC AMERICAN SUPPLEMENT 1123. Price 10 cents. For sale by Munn & Co. and all newsdealers. Send for catalogue.

BELLE ISLE Marine Engine

2 to 3 H. P. Bare Engine **$23**

Swiftest, most powerful, efficient and reliable 2-Cycle engine of its size on earth—entirely new design, improved and perfected in every detail—makes speedy little launch from an ordinary rowboat. Catalog describing all sizes FREE.

New Belle Isle Motor Co., Dept 0, Detroit, Mich.

NOTHING EXTERNAL REVOLVES

Detroit REVERSE GEAR

STARTS RECEDES INSTANTANEOUSLY STOPS

Designed and manufactured under the personal direction of Geo. Bros. All in an oil tight case.

The simplest, most reliable, most compact, and the smallest perfect marine reverse gear ever offered. No outside moving parts to throw the oil or grease catch waste or clothes. No noise. Made in sizes for from 2 to 80 H. P. All sizes in stock for immediate shipment in any quantity. Guaranteed for 1 year. Write for special prices.

DETROIT ENGINE WORKS. 20 Beaufait Ave., Detroit, Mich.

Cheap and Reliable Water Supply

For irrigation, mining, on the stock or dairy farm and for suburban homes the

NIAGARA HYDRAULIC RAM

is the cheapest pump you can install. No coal; no steam; no oil; no labor—no cost after installation. Works day and night. Write for catalogue AA and estimate. We furnish Caldwell Tanks and Towers.

NIAGARA HYDRAULIC ENGINE CO., 140 Nassau St., N. Y. Factory: Chester, Pa.

Build Your Own Fireless Cooker

and save money. Anyone can do it. No mechanical ability or experience required. I supply all material and teach you how to do the work.

Make Fireless Cookers for sale. Good profits, big demand, easily sold. I give exclusive territory and assist you in selling the goods. Full particulars free. Write today.

H. M. SHEER, Box 12, QUINCY, ILL.

Tuttle Stove. The Acme Automatic Cooker holds stews, roasts and bakes. Does better cooking and saves 80 per cent fuel and kitchen drudgery. Bakes the food, not the cook.

Lowest Priced Boats of Quality in the World
The New Mullins 1909 Models

Designed by the world's greatest naval architects—Whittelsey & Whitaker, of New York. N. Y. They outclass all other boats. Those remarkable new models are perfect in construction and detail. The One Man Control makes them simpler to operate than an automobile. Mullins Underwater Exhaust makes them noiseless and eliminates odors, dirt and grease. The Improved Reversible Engine, the celebrated "Ferro," is the simplest, most dependable marine engine built.

Built of steel like government torpedo boats. They cannot leak, sink, waterlog or warp—never require calking, bailing or drying out—always dry, clean, comfortable and absolutely safe.

We are the largest builders in the world of Launches, Motor Boats, Row Boats, Hunting and Fishing Boats.

Write today for complete Catalog, and learn all about these wonderful boats and their low cost.

W. H. Mullins Company, 203 Franklin Street, Salem, Ohio.

Engineering News

(ILLUSTRATED)

The Leading Engineering Paper of the World. For Civil, Mechanical, Mining and Electrical Engineers 100 to 125 pages, 9" x 13", weekly. Send ten cents for sample copy.

If you cannot locate desired engineering equipment write our "Readers Want" department.

THE ENGINEERING NEWS PUBLISHING CO. 214 Broadway, New York

Highest Standard Equipment

Full 18-20 Horse Power

This Is Quality In a High Wheel Car

Automobile experts appreciate how much it costs us to make this car the very highest standard of its type. If you are not an expert on materials and construction you should read our catalog before buying any high wheel solid tire runabout. To make this simple to operate and permanently satisfactory car costs us more per car in thousand lots than others get with large profit on one car sale.

But find out where you get your money-worth at a reasonable price in

The Only Invincible **Schacht**

To Remind You

Schacht Mfg. Co.
2700 Spring Grove Ave., Cincinnati, O.
Send me your Automobile Catalog, post paid, free.

Name.....
Address.....
Town.....State.....
(Cut out and mail this to us.)

IRVING'S WIZARD PIPE

Constant re-orders with unsolicited testimonials warrant our assertion that this radical departure in pipe construction marks a new epoch in the use of tobacco.

A REVELATION TO SMOKERS

Several tests prove new principle correct. **Draft and fire below, tobacco above, kept dry and sweet by the rising heat.** Perfect combustion uninterrupted by saliva consumes nicotine tar. Antiseptic wick in cartridge shell absorbs all saliva and moisture (see sectional cut). **Smoke sweet and clean enough to inhale.** CIGARETTE SMOKERS by the hundred are being converted to this pipe's use. A neat complete pocket composition where it can be placed (lighted) with absolute safety without the spilling of fire or ashes. *For excellence* for house, office, or street, short or long smokes. For anyone wishing *the very best that money will buy.*

Straight or Curved Stems

Genuine French briar bowls, best rubber stems.

Three Styles

Style X, $1.00; Style O, $1.50; Style XX, sterling silver mounted in leather covered case, $2.00.

Mailed postpaid with 1 dozen antiseptic cartridges upon receipt of price.



The B. P. O. E. Best Pipe on Earth — For the B. P. O. E. Best People on Earth

Wizard Patent Developing Co., Inc. Dept. R, 127 E. W. 31st St., New York

Liberal terms to dealers

LEARN TO BE A WATCHMAKER

Bradley Polytechnic Institute
Horological Department
Peoria, Illinois
Formerly Parsons Horological Inst.
Largest and Best Watch School in America

We teach Watch Work, Jewelry, Engraving, Clock Work, Optics. Tuition reasonable. Board and rooms near school at moderate rates. Send for Catalog of Information.

CRUDE ASBESTOS

DIRECT FROM MINES

PREPARED ASBESTOS FIBRE for Manufacturers use

R. H. MARTIN, OFFICE, ST. PAUL BUILDING 220 B'way, New York.

MENNEN'S

BORATED TALCUM

TOILET POWDER

After Shaving.

Insist that your barber use Mennen's Toilet Powder after he shaves you. It is antiseptic, and will prevent any of the skin diseases often contracted. A positive relief for Prickly Heat, Chafing and Sunburn, and all afflictions of the skin. Removes all odor of perspiration. Get Mennen's—the original. Sold everywhere, or mailed for 25 cents. SAMPLE FREE.

GERHARD MENNEN CO., Newark, N. J.

Save Money by Machinery!

You can do this easily with the right machine in all furniture factories.

DODDS' TILTING CIRCULAR SAW

uptilts to 45 degrees, simplifies the work and insures perfect accuracy in cutting. Removable throat in table. 12-inch rip or cross-cut saw with each machine. Write for free illustrated catalogue and price list.

ALEXANDER DODDS, Grand Rapids, Mich., U. S. A.

WE WILL MAKE

your models and give you estimates on manufacture of any metal novelty. Automatic machinery, tools, dies and expert work our specialty.

AUTOMATIC HOOK & EYE CO., Hoboken, N. J.

HELMET OIL

LUBRICATES ANYTHING SEND FOR SAMPLE FREE

C. H. BESLY & CO. 19-21 S. CLINTON ST. CHICAGO U.S.A.